



US007218938B1

(12) **United States Patent**  
**Lau et al.**

(10) **Patent No.:** **US 7,218,938 B1**  
(45) **Date of Patent:** **May 15, 2007**

(54) **METHODS AND APPARATUS TO ANALYZE AND PRESENT LOCATION INFORMATION**

5,512,902 A 4/1996 Guthrie et al.  
5,515,858 A 5/1996 Myllymaki  
5,528,247 A 6/1996 Nonami

(76) Inventors: **Chung Lau**, 859 Russet Dr., Sunnyvale, CA (US) 94087; **Peter P. Tong**, 1807 Limetree La., Mountain View, CA (US) 94040; **C. Douglass Thomas**, 1193 Capri Dr., Campbell, CA (US) 95008

(Continued)

**FOREIGN PATENT DOCUMENTS**

EP 1 037 447 A2 9/2000

(Continued)

**OTHER PUBLICATIONS**

J. Wroldstad, "Chrysler Claims First With Bluetooth Mobile Phone System," Wireless Newsfactor, Oct. 26, 2001.

(Continued)

*Primary Examiner*—Quynh H. Nguyen

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 808 days.

(21) Appl. No.: **10/397,472**

(22) Filed: **Mar. 26, 2003**

**Related U.S. Application Data**

(60) Provisional application No. 60/444,198, filed on Jan. 30, 2003, provisional application No. 60/418,491, filed on Oct. 15, 2002, provisional application No. 60/404,645, filed on Aug. 19, 2002, provisional application No. 60/375,998, filed on Apr. 24, 2002.

(57) **ABSTRACT**

Method and apparatus to analyze and present location information in an easy-to-digest manner are disclosed. In one embodiment, each piece of location information can include a piece of location-designating information and a piece of location-related information. Location-designating information is primarily for identifying location. Location-related information is information related to location-designating information. The location-designating information and the location-related information can be supplied by a mobile device. With the help of location-related information, each piece of location-designating information can be more accurately transformed into a label to help identify a location. The amount of location information can be reduced. All of the location-designating information pertaining to a given area can be consolidated into one piece of location-designating information related to the label. Consolidation of some of the information may not occur if a piece of location-related information changes by more than a preset value. To better present location information in an easy-to-digest manner, location information can be compared to standards. Presentation can be on a display with respect to a reference location.

(51) **Int. Cl.**

**H04Q 7/20** (2006.01)

(52) **U.S. Cl.** ..... **455/456.1**; 455/456.2; 455/456.3; 455/404.2; 455/414.2; 455/440; 340/539.13; 340/825.49; 340/988; 342/357.01; 342/357.06; 342/357.07; 342/357.13; 342/457; 701/213; 701/214; 701/215


(58) **Field of Classification Search** ..... 455/456.1, 455/456.2, 456.3, 404.2, 414.2, 440; 340/539.13, 340/825.49, 988; 342/357.01, 357.06, 357.07, 342/357.13, 457; 701/213, 214, 215  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,389,934 A 2/1995 Kass  
5,400,020 A 3/1995 Jones et al.  
5,461,365 A 10/1995 Schlager et al.  
5,491,486 A 2/1996 Welles, II et al.

**32 Claims, 11 Drawing Sheets**

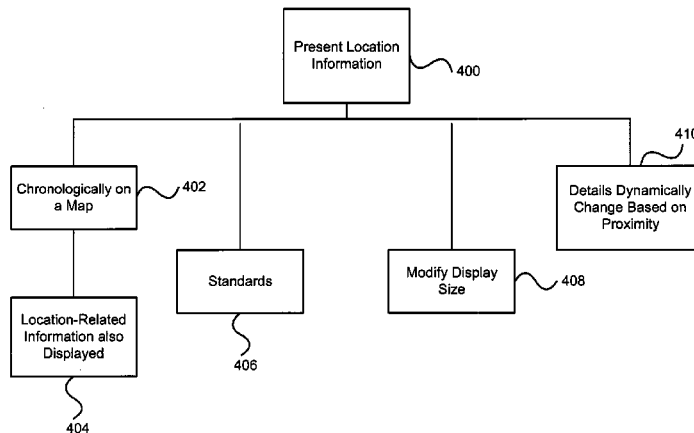

# US 7,218,938 B1

Page 2

U.S. PATENT DOCUMENTS					
5,528,518	A	6/1996 Bradshaw et al.	6,282,362	B1	8/2001 Murphy et al.
5,539,748	A	7/1996 Raith	6,292,687	B1	9/2001 Lowell et al.
5,541,845	A	7/1996 Klein	6,298,306	B1	10/2001 Suarez et al.
5,550,551	A	8/1996 Alesio	6,300,875	B1	10/2001 Schafer
5,568,119	A	10/1996 Schipper et al.	6,314,308	B1	11/2001 Sheynblat et al.
5,570,412	A	10/1996 LeBlanc	6,317,049	B1	11/2001 Toubia et al.
5,576,716	A	11/1996 Sadler	6,323,807	B1	11/2001 Golding et al.
5,592,173	A	1/1997 Lau et al.	6,324,213	B1	11/2001 Harrison
5,623,260	A	4/1997 Jones	6,327,533	B1	12/2001 Chou
5,629,678	A	5/1997 Gargano et al.	6,331,817	B1	12/2001 Goldberg
5,652,570	A	7/1997 Lepkofker	6,339,397	B1	1/2002 Baker
5,710,551	A	1/1998 Ridgeway	6,340,928	B1	1/2002 McCurdy
5,712,619	A	1/1998 Simkin	6,349,257	B1	2/2002 Liu et al.
5,731,757	A	3/1998 Layson et al.	6,353,390	B1	3/2002 Beri et al.
5,731,788	A	3/1998 Reeds	6,353,798	B1	3/2002 Green et al.
5,742,233	A	4/1998 Hoffman et al.	6,356,841	B1	3/2002 Hamrick et al.
5,751,245	A	5/1998 Janky et al.	6,362,778	B2	3/2002 Neher
5,771,001	A	6/1998 Cobb	6,363,254	B1	3/2002 Jones et al.
5,774,876	A	6/1998 Woolley et al.	6,363,323	B1	3/2002 Jones
5,797,091	A	8/1998 Clise et al.	6,377,810	B1	4/2002 Geiger
RE35,920	E	10/1998 Sorden et al.	6,388,612	B1	5/2002 Neher
5,835,907	A	11/1998 Newman	6,407,698	B1	6/2002 Ayed
5,841,352	A	11/1998 Prakash	6,411,892	B1	6/2002 Van Diggelen
5,844,862	A	12/1998 Cocatre-Zilgien	6,411,899	B2	6/2002 Dussell et al.
5,850,196	A	12/1998 Mowers	6,421,538	B1	7/2002 Byrne
5,889,770	A	3/1999 Jokiaho et al.	6,427,120	B1	7/2002 Garin et al.
5,948,043	A	9/1999 Mathis	6,430,602	B1	8/2002 Kay et al.
5,959,575	A	9/1999 Abbott	6,433,732	B1	8/2002 Dutta et al.
5,959,577	A	9/1999 Fan et al.	6,441,778	B1	8/2002 Durst et al.
5,963,130	A	10/1999 Schlager et al.	6,442,380	B1	8/2002 Mohindra
6,002,363	A	12/1999 Krasner	6,445,937	B1	9/2002 daSilva
6,002,982	A	12/1999 Fry	6,453,237	B1	9/2002 Fuchs et al.
6,009,319	A	12/1999 Khullar et al.	6,469,639	B2	10/2002 Tanenhaus et al.
6,013,007	A	1/2000 Root et al.	6,471,087	B1	10/2002 Shusterman
6,014,080	A	1/2000 Layson, Jr.	6,478,736	B1	11/2002 Mault
6,014,090	A	1/2000 Rosen et al.	6,513,532	B2	2/2003 Mault et al.
6,023,241	A	2/2000 Clapper	6,522,871	B1	2/2003 Patrick et al.
6,032,051	A	2/2000 Hall et al.	6,522,889	B1	2/2003 Aarnio
6,034,622	A	3/2000 Levine	6,529,164	B1	3/2003 Carter
6,054,928	A	4/2000 Lemelson	6,544,193	B2	4/2003 Abreu
6,064,336	A	5/2000 Krasner	6,552,652	B2	4/2003 Beken
6,067,018	A	5/2000 Skelton et al.	6,559,620	B2	5/2003 Zhou et al.
6,067,044	A	5/2000 Whelan et al.	6,579,231	B1	6/2003 Phipps
6,072,396	A	6/2000 Gaukel	6,625,437	B1	9/2003 Jampolsky et al.
6,078,290	A	6/2000 McBurney et al.	6,640,085	B1 *	10/2003 Chatzipetros et al. .... 455/3.02
6,083,248	A	7/2000 Thompson	6,650,907	B1 *	11/2003 Kamperschroer et al. ... 455/522
6,083,353	A	7/2000 Alexander	6,747,675	B1	6/2004 Abbott et al.
6,094,168	A	7/2000 Duffett-Smith et al.	6,804,606	B2	10/2004 Jones
6,100,806	A	8/2000 Gaukel	6,847,892	B2	1/2005 Zhou et al.
6,131,067	A	10/2000 Girerd et al.	6,952,645	B1	10/2005 Jones
6,141,570	A	10/2000 O'Neill, Jr. et al.	6,975,941	B1	12/2005 Lau et al.
6,144,303	A	11/2000 Federman	2001/0006891	A1	7/2001 Cho
6,148,280	A	11/2000 Kramer	2001/0020204	A1	9/2001 Runyon et al.
6,163,696	A	12/2000 Bi et al.	2001/0028304	A1	10/2001 I'Anson et al.
6,171,264	B1	1/2001 Bader	2001/0044299	A1	11/2001 Sandegren
6,172,640	B1	1/2001 Durst et al.	2001/0052849	A1	12/2001 Jones, Jr.
6,175,616	B1	1/2001 Light et al.	2002/0000930	A1	1/2002 Crowson et al.
6,198,390	B1	3/2001 Schlager et al.	2002/0027507	A1	3/2002 Yarin et al.
6,198,431	B1	3/2001 Gibson	2002/0038182	A1	3/2002 Wong et al.
6,198,930	B1	3/2001 Schipper	2002/0050945	A1	5/2002 Tsukishima et al.
6,199,045	B1	3/2001 Giniger et al.	2002/0057192	A1	5/2002 Eagleson et al.
6,226,622	B1	5/2001 Dabbieri	2002/0063622	A1	5/2002 Armstrong et al.
6,231,519	B1	5/2001 Blants et al.	2002/0077080	A1	6/2002 Greene
6,232,916	B1	5/2001 Grillo et al.	2002/0087260	A1	7/2002 Hancock et al.
6,236,358	B1	5/2001 Durst et al.	2002/0111171	A1	8/2002 Boesch et al.
6,238,337	B1	5/2001 Kambhatla et al.	2002/0111819	A1	8/2002 Li et al.
6,243,039	B1	6/2001 Elliot	2002/0115453	A1	8/2002 Poulin et al.
6,243,660	B1	6/2001 Hsu et al.	2002/0119789	A1	8/2002 Friedman
6,246,376	B1	6/2001 Bork et al.	2002/0193121	A1	12/2002 Nowak et al.
6,263,280	B1	7/2001 Stingone, Jr.	2003/0003943	A1	1/2003 Bajikar
6,278,936	B1	8/2001 Jones	2003/0013445	A1	1/2003 Fujiwara et al.
			2003/0151507	A1	8/2003 Andre et al.
			2004/0034470	A1	2/2004 Workman

2004/0117108 A1 6/2004 Nemeth  
2006/0173444 A1 8/2006 Choy et al.

## FOREIGN PATENT DOCUMENTS

WO	WO 97/41654	11/1997
WO	WO 98/017969 A1	1/1998
WO	WO 98/16045	4/1998
WO	WO 00/51391	8/2000
WO	WO 01/50151 A1	7/2001
WO	WO 02/42979 A1	5/2002
WO	WO 02/084618 A1	10/2002
WO	WO 03/012720 A1	2/2003

## OTHER PUBLICATIONS

K. Miyake, "Sharpe to unveil 3G PDA-type cell phone," ITworld.com, Inc., Jan. 11, 2002.

"Audiovox Intros GPS, Bluetooth Phone," INT Media Group, Inc. (allNetDevices), Apr. 5, 2002. (downloaded: [www.allnetdevices.com/wireless/news/2001/1/15/audiovox\\_intros.html](http://www.allnetdevices.com/wireless/news/2001/1/15/audiovox_intros.html)).

"Start-up crams single chip with phone, GPS and Bluetooth," CNET Network, Inc. (ZDNET), Mar. 22, 2002 (downloaded: <http://news.zdnet.co.uk/story/0,t284-x2107163.00.html>).

Smart Antenna, Specification sheet by Axiom Navigation Inc. ([www.axiomnav.com](http://www.axiomnav.com)).

Swift B2 GPS Receiver, Specification sheet by Axiom Navigation Inc. ([www.axiomnav.com](http://www.axiomnav.com)).

Swift A2 GPS Receiver, Specification sheet by Axiom Navigation Inc. ([www.axiomnav.com](http://www.axiomnav.com)).

SandPiper GPS Receiver, Specification sheet by Axiom Navigation Inc. ([www.axiomnav.com](http://www.axiomnav.com)).

"Fleet Management Systems—Asset Tracking Devices," Axiom Navigation Inc., 2000-2001 (downloaded Oct. 19, 2002: [www.axiomnav.com/Prod\\_Systems/prod\\_systems.asp](http://www.axiomnav.com/Prod_Systems/prod_systems.asp)).

"Global Cell Phone Location," Axiom Navigation Inc., 2000-2001 (downloaded Oct. 19, 2002: [www.axiomnav.com/Prod\\_Global/prod\\_global.asp](http://www.axiomnav.com/Prod_Global/prod_global.asp)).

"X-GPS™—Hybrid GPS Location Server Solution," Axiom Navigation Inc., 2000-2001 (downloaded Oct. 19, 2002: [www.axiomnav.com/Prod\\_Global/x-gps.asp](http://www.axiomnav.com/Prod_Global/x-gps.asp)).

"Digital/Analog Compass Sensors" and "1655 Digital Compass Sensor," webpages, The Robson Company, Inc., pp. 1-2 (downloaded Apr. 11, 2002: [www.dinsmoresensors.com/index.html](http://www.dinsmoresensors.com/index.html)).

Delphi and MobileAria Demonstrate True Hands Free In-Vehicle Mobile Productivity Services At CES, Press Release, Delphi Automotive Systems, Jan. 8, 2002 (downloaded Apr. 5, 2002: [www.delphiauto.com/news/pressRelease/pr6828-01082002](http://www.delphiauto.com/news/pressRelease/pr6828-01082002)).

"NavMate® Navigation System," Visteon Corporation, webpage, pp. 1-2 (downloaded Jun. 21, 2002: [www.visteon.com/technology/automotive/navmate.html](http://www.visteon.com/technology/automotive/navmate.html)).

"Danger—Products" and "Hiphop Communicator Brochure," Danger, Inc., downloaded Oct. 26, 2003: [www.danger.com/products.php](http://www.danger.com/products.php).

"MMS phones: Dont't believe the hype," CNN.com/SCI-TECH, Aug. 8, 2002, pp. 1-3.

"What is "3G" technology?," CNN.com/SCI-TECH, Oct. 22, 2001, pp. 1-3.

"Devices for Text Messages in Deutsche Telekom's fixed network have already found their way into many households," Deutsche Telekom AG, Press Release, Mar. 13, 2002, pp. 1-2.

"FunMail Launches on the NTT DoCoMo i-mode network," FunMail, Press Release, May 1, 2001, pp. 1-2.

"Send images to i-mode phones," Mobile Media Japan, 2001, pp. 1-3.

"Introduction to SMS," by C. Tull of Anywhere YouGo.com, pp. 1-4 (downloaded: [www.devx.com/wireless/articles/SMS/SMSintro.asp](http://www.devx.com/wireless/articles/SMS/SMSintro.asp)).

"The Always on Network," Position Paper, Nortel Networks, 2002.

"Mobile Location Based Services: Cell Tracking Devices of People & Thongs . . .," pp. 1-2, (downloaded Aug. 10, 2002: <http://3glocate.com>).

"3G Mobile Internet Revolution, . . . only with Location Based Services!" pp. 1, (downloaded Aug. 10, 2002: <http://webhome.idirect.com/~dental/3glocator/home.htm>).

"What are Instant Messages?" Yahoo! Messenger Help, Yahoo! Inc., 2002, pp. 1.

"What is a Friend List?" Yahoo! Messenger Help, Yahoo! Inc., 2002, pp. 1.

"Status Icons/Messages," Yahoo! Messenger Help, Yahoo! Inc., 2002, pp. 1-2.

"Yahoo! Messenger for WAP," Yahoo Messenger, Yahoo! Inc., 2002 (tours 1-9), pp. 1-17 (downloaded Oct. 27, 2002: [www.messenger.yahoo.com/messenger/wireless/wap/tour1.html](http://www.messenger.yahoo.com/messenger/wireless/wap/tour1.html) (through /tour9.html)).

IMVironment, Yahoo! Meseanger, Yahoo! Inc., 2002, pp. 1-12 (downloaded (including) Oct. 27, 2002: <http://help.yahoo.com/help/us/mesg/imv/imv-01.html> (through /index5.html)).

"Yahoo! Messenger for Text Messaging," Yahoo! Messenger, Yahoo! Inc., 2002, pp. 1-10 (downloaded Oct. 27, 2002: <http://messenger.yahoo.com/messenger/wireless/smsmsg/tour1.html> (through /tour7.html)).

"Yahoo! Messenger—Sending Messages to a Mobile Phone," Yahoo! Messenger, Yahoo! Inc., 2002, pp. 1-7 (downloaded Oct. 27, 2002: <http://messenger.yahoo.com/messenger/wireless/pc2sms/tour1.html> (through /tour7.html)).

LoadTrak, pp. 1-2 (downloaded Jun. 4, 2002: [www.load-trak.com](http://www.load-trak.com)).

"pulver.com's Location Based Services Report," pulver.com, Inc., Oct. 2001, pp. 1-17 (downloaded Jun. 4, 2002: [www.pulver.com/lbsreport/lastbsreport.02/oct01.txt](http://www.pulver.com/lbsreport/lastbsreport.02/oct01.txt)).

"Wherify Wireless GPS Locator for Kids User Guide," Wherify Wireless, Inc., 2003, pp. 1-106.

"Wherify Wireless and SiRF Team to Deliver Child Locator System," Wherify Wireless, Inc., Press Release, Mar. 19, 2001, pp. 1-2.

"Wherify Wireless Breakthrough in Location-Based Services," Mobilemag.com, Feb. 28, 2001, pp. 1.

"Wherify Wireless Location Services," Wherify Wireless, Inc., webpages, pp. 1-5 (downloaded: Mar. 25, 2003: [www.wherifywireless.com/prod\\_watches.htm](http://www.wherifywireless.com/prod_watches.htm)).

Marek, "The Unstoppable SnapTrack," Wireless Week, Dec. 18, 2000.

Rabinowitz and Spilker, Jr., "Positioning Using the ATSC Digital Television Signal," Rosum Corporation Whitepaper, Rosum Corporation (downloaded May 21, 2003).

Rabinowitz and Spilker, Jr., "A New Positioning System Using Television Synchronization Signals," Rosum Corporation, pp. 1-11 (downloaded May 21, 2003).

"Trimble and Rosum Team to Develop Universal Positioning Technology," Trimble Navigation, Inc., News Release, Feb. 27, 2003.

Wong, "Fishers, golfers join the rush to GPS," San Jose Mercury News, news article, Mar. 25, 2002.

Ryan, "Catching up with Dick Tracy," San Francisco Chronicle, news article, Mar. 18, 2002.

"Theme Park Visitors & Cashless Purchasing," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies.themepark.html](http://www.rji.cc/casestudies.themepark.html)).

"Ski Rental with Auto ID and Tracking," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies/skirentalcompany.html](http://www.rji.cc/casestudies/skirentalcompany.html)).

"Real-Time Warehouse Tracking," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies/rwarehousetracking.html](http://www.rji.cc/casestudies/rwarehousetracking.html)).

"Frozen Food Warehouse," Case Study, RJI Incorporated, webpages, pp. 1-3 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies/frozenfoodwarehouse.html](http://www.rji.cc/casestudies/frozenfoodwarehouse.html)).

"Airline Cargo Containers," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies/airlinecargocounters.html](http://www.rji.cc/casestudies/airlinecargocounters.html)).

"Airline Food Carts," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/casestudies/airlinefoodcarts.html](http://www.rji.cc/casestudies/airlinefoodcarts.html)).

"Real Time Location System (RTLS)," Case Study, RJI Incorporated, webpage, p. 1 (downloaded Mar. 16, 2002: [www.rji.cc/technology/rtls.html](http://www.rji.cc/technology/rtls.html)).

- "Radio Frequency Identification (RFID)," Case Study, RJI Incorporated, webpage, p. 1 (downloaded Mar. 16, 2002: [www.rji.cc/technology/rfid.html](http://www.rji.cc/technology/rfid.html)).
- "MoniTrack," Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded Mar. 16, 2002: [www.rji.cc/technology/telematic.html](http://www.rji.cc/technology/telematic.html)).
- "Parkwatch and Wherenet Unveil the First Amusement Visitor Locating System," ParkWatch, Press Release, Jun. 27, 2000. Real Time Locating System, Executive Summary, Technology Systems International, Inc.
- "Locate Networks: Our Service," Locate Networks, webpages, pp. 1-7 (downloaded Sep. 26, 2002: [www.locatenetworks.com/](http://www.locatenetworks.com/)).
- "Technical Applications Of Our Current Technology," Aetherwire, webpages, pp. 1-4 (downloaded Mar. 16, 2002: [www.aetherwire.com/CDROM/General/appl1.html](http://www.aetherwire.com/CDROM/General/appl1.html)).
- Bickers, "Eyes in the sky," SafeTzone Technology Corporation, webpages, 2001, pp. 1-3 (downloaded: [www.safetzone.com/newsKiosk.asp](http://www.safetzone.com/newsKiosk.asp)).
- "IO Data Develops GPS Adapter for I-Mode Mobile," AsiaBizTech, Sep. 17, 2002, pp. 1-2.
- "Pakhound: Your Watchdog In The Shipping Industry," website pages, pp. 1-3 (downloaded Jun. 9, 2002: [www.pakhound.com/fact.asp](http://www.pakhound.com/fact.asp)).
- "Guide to Tracking Info.," Nippon Express, website page, p. 1 (downloaded Jun. 9, 2002: [www.nittsu.co.jp/edoc/howtoe.htm](http://www.nittsu.co.jp/edoc/howtoe.htm)).
- My.Roadway!, Roadway Express, Inc., webpages, pp. 1-2, (downloaded Jun. 9, 2002: [www.quicktrak.roadway.com/cgi-bin/quicktrak](http://www.quicktrak.roadway.com/cgi-bin/quicktrak)).
- Packtrack™, PackTrack.com, webpages, pp. 1-2 (downloaded Jun. 9, 2002: [www.packtrack.com](http://www.packtrack.com)).
- "Welcome to Tracker Systems," Tracker Systems, webpages, pp. 1-2 (downloaded Jun. 9, 2002: [www.trackersystems.com](http://www.trackersystems.com)).
- "Welcome to Iship, Inc.," iShip, Inc., webpages, pp. 1-2, (downloaded Jun. 9, 2002: [www.iship.com/](http://www.iship.com/)).
- "Turning Position Into Knowledge," SkyBitz, webpage, p. 1, (downloaded Nov. 15, 2002: [www.skybitz.com](http://www.skybitz.com)).
- "News," SkyBitz, webpages, pp. 1-8, (downloaded Nov. 15, 2002: [www.skybitz.com/about/news.html](http://www.skybitz.com/about/news.html)).
- "GLS Communicator," SkyBitz, webpages, pp. 1-2, (downloaded Nov. 15, 2002: [www.skybitz.com/gls/communicator.html](http://www.skybitz.com/gls/communicator.html)).
- "Global Locating Services," SkyBitz, webpage, p. 1, (downloaded Nov. 15, 2002: [www.skybitz.com/services/gls.html](http://www.skybitz.com/services/gls.html)).
- F. Rivera, "Special Report: Keeping Tabs on Your Teen," 7 News, Boston, Apr. 30, 2002, pp. 1-3.
- GPS2000, Omega Research and Development, Inc., webpages, pp. 1-9 (pp. 7-9 pertain to an online tour) (downloaded Jul. 14, 2003: [www.gps2000online.com/](http://www.gps2000online.com/)).
- "Track Your FedEx Shipments via Email," FedEx, webpages, pp. 1-2 (downloaded Oct. 29, 2002: [www.fedex.com](http://www.fedex.com)).
- "Track Shipments—Detailed Results," FedEx, webpages, pp. 1-2 (downloaded Oct. 29, 2002: [www.fedex.com](http://www.fedex.com)).
- FedEx Insight, FedEx, webpages, pp. 1-11 (downloaded Oct. 29, 2002: [www.fedex.com](http://www.fedex.com)).
- "Tracking Helpful Tips," United Parcel Service of America, Inc. (UPS), webpages, pp. 1-2 (downloaded Jun. 1, 2002: [www.ups.com/tracking/nm\\_help.html](http://www.ups.com/tracking/nm_help.html)).
- "My UPS.com Benefits," United Parcel Service of America, Inc. (UPS), webpages, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/benefits?pnav=stdsservice](http://www.ups.com/myupsinfo/info/benefits?pnav=stdsservice)).
- "Enhanced Tracking," United Parcel Service of America, Inc. (UPS), webpages, pp. 1-2 (downloaded Jun. 1, 2002: [www.ups.com/myupsinfo/info/etrack?pnav=stdsservice](http://www.ups.com/myupsinfo/info/etrack?pnav=stdsservice)).
- "UPS Package Tracking," United Parcel Service of America, Inc. (UPS), webpages, pp. 1-2 (downloaded Apr. 13, 2002: [www.ups.com/tracking/tracking.html](http://www.ups.com/tracking/tracking.html)).
- "UPS Wireless Solutions," United Parcel Service of America, Inc. (UPS), webpage, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/wireless?pnav=stdsservice](http://www.ups.com/myupsinfo/info/wireless?pnav=stdsservice)).
- Crossbow Product Guide—Accelerometers, Crossbow Technology, Inc., webpages, pp. 1-3 (downloaded Apr. 11, 2002: [www.xbow.com/Products/Accelerometers.htm](http://www.xbow.com/Products/Accelerometers.htm)).
- Accelerometers—General Purpose, LP Series, Crossbow Technology, Inc., data sheet, pp. 1-3 (downloaded Apr. 11, 2002: [www.xbow.com/Products/Accelerometers.htm](http://www.xbow.com/Products/Accelerometers.htm)).
- Precision Accelerometers, PCB Piezoelectronics Products—SVS Division, webpages, pp. 1-2 (downloaded Apr. 11, 2002: [www.pcb.com/products/svs/index.html](http://www.pcb.com/products/svs/index.html)).
- "352C22 Miniature Low Profile ICP Accelerometer," Precision Accelerometers, PCB Piezoelectronics Products—SVS Division, webpages, pp. 1-2 (downloaded Apr. 11, 2002: [www.pcb.com/products/svs/svs352c22.html](http://www.pcb.com/products/svs/svs352c22.html)).
- K. Hill, "Prada Uses Smart Tags To Personalize Shopping," CRMDaily.com, Apr. 24, 2002., pp. 1-4.
- "Savi Reusable Transport Container," Savi Technology, Inc., Apr. 30, 2002, pp. 1-2.
- "Developing a GPSs for the Global Supply Chain," Aberdeen Group, Inc., Executive White Paper, Jun. 2002.
- Motorola Consumer Catalog: Pagers (webpage), Motorola, Inc., downloaded Jan. 19, 2000.
- SnapTrack in Action (webpage), SnapTrack Inc., downloaded Jan. 19, 2000.
- SnapTrack—Technology At Work (webpage), SnapTrack Inc., downloaded Jan. 19, 2000.
- SnapTrack—Privacy Protection (webpage), SnapTrack Inc., downloaded Jan. 19, 2000.
- "An Introduction to SnapTrack Server-Aided GPS Technology," SnapTrack Inc.
- "SnapTrack and SignalSoft Corp. Team Up to Trial Location-based Information Service for GSM Test Group," Press Release, SnapTrack Inc., Dec. 6, 1999.
- "SnapTrack Awarded Additional Key Patents for Enhanced GPS System," Press Release, SnapTrack Inc., Jan. 4, 2000.
- TruePosition Virtual Brochure (webpage), TruePosition, Inc.
- "Carrier and end-user applications for wireless location systems," TruePosition, Inc., pp. 1-7.
- Stilp, Louis A., "Examining the Coming Revolution in Location Services," pp. 1-11.
- Commercial Uses for LoJack (webpage), LoJack Corporation, downloaded Jan. 22, 2000.
- Chertkoff, Rachel, "Vehicle Locator Systems," Pager Technology, pp. 1-2, 1998.
- "EarthTrack™ Vehicle Tracking Systems," Outfitter Satellite, Inc., 1998 (downloaded Jan. 22, 2000).
- Kleinknecht, William, "Juvenile authorities want satellite tracking for felons," The Star-Ledger of New Jersey, Nov. 18, 1997.

\* cited by examiner

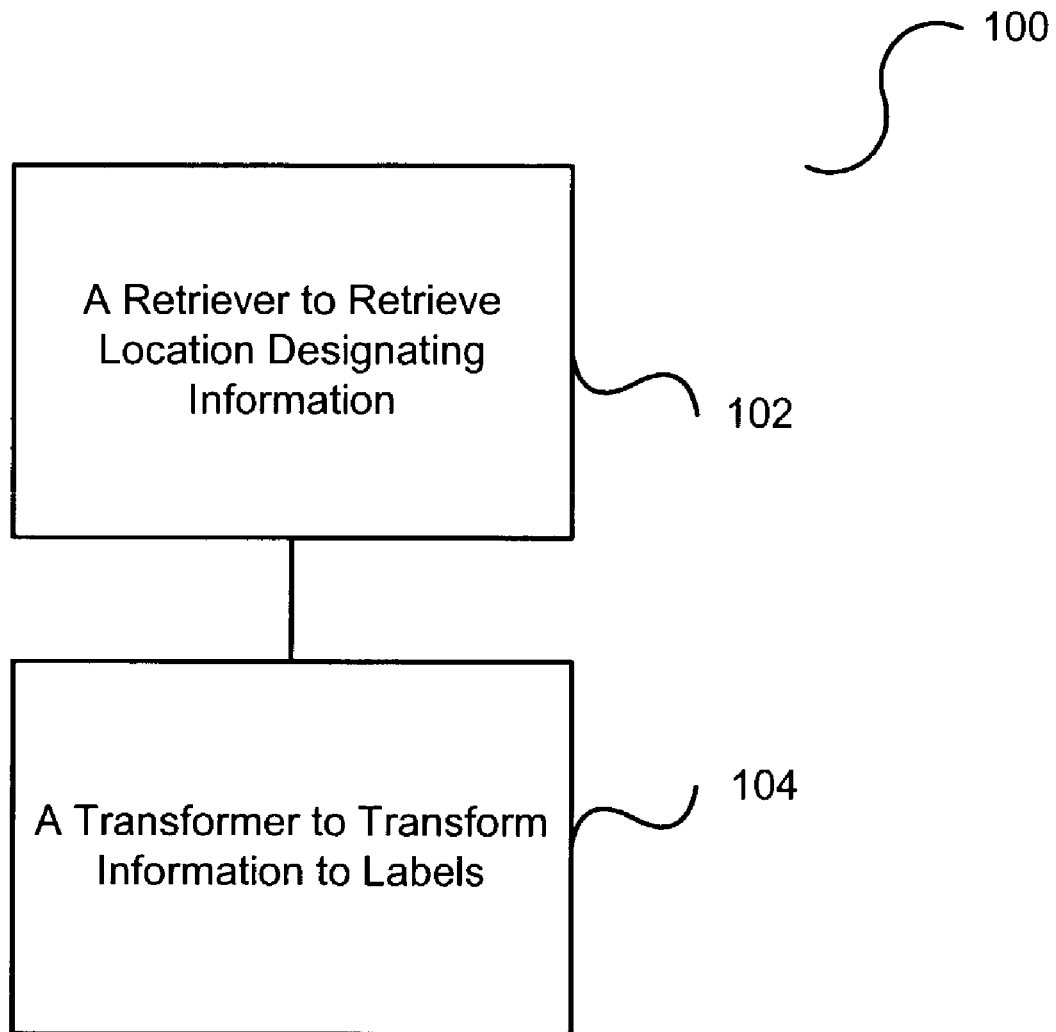


Figure 1(a)

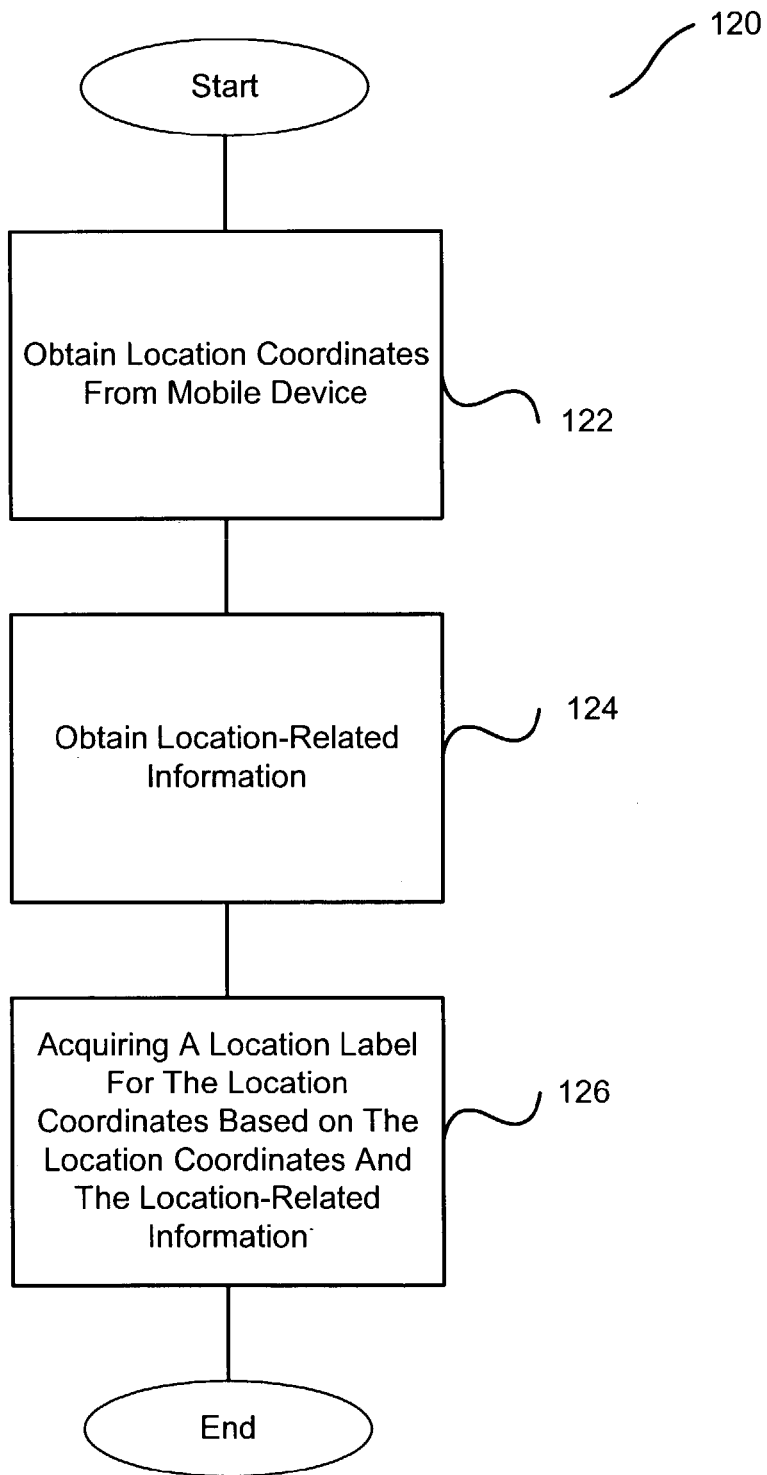


Figure 1(b)

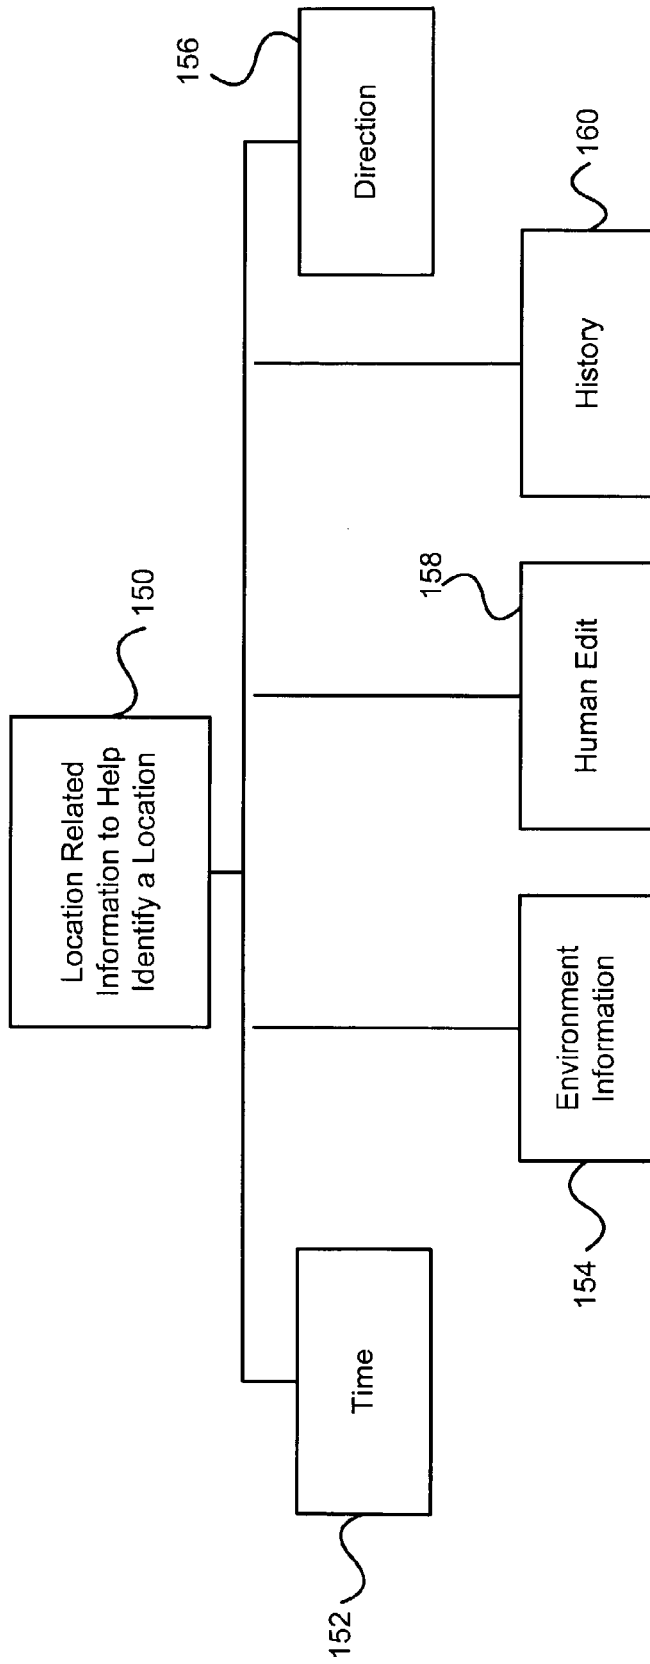


Figure 2

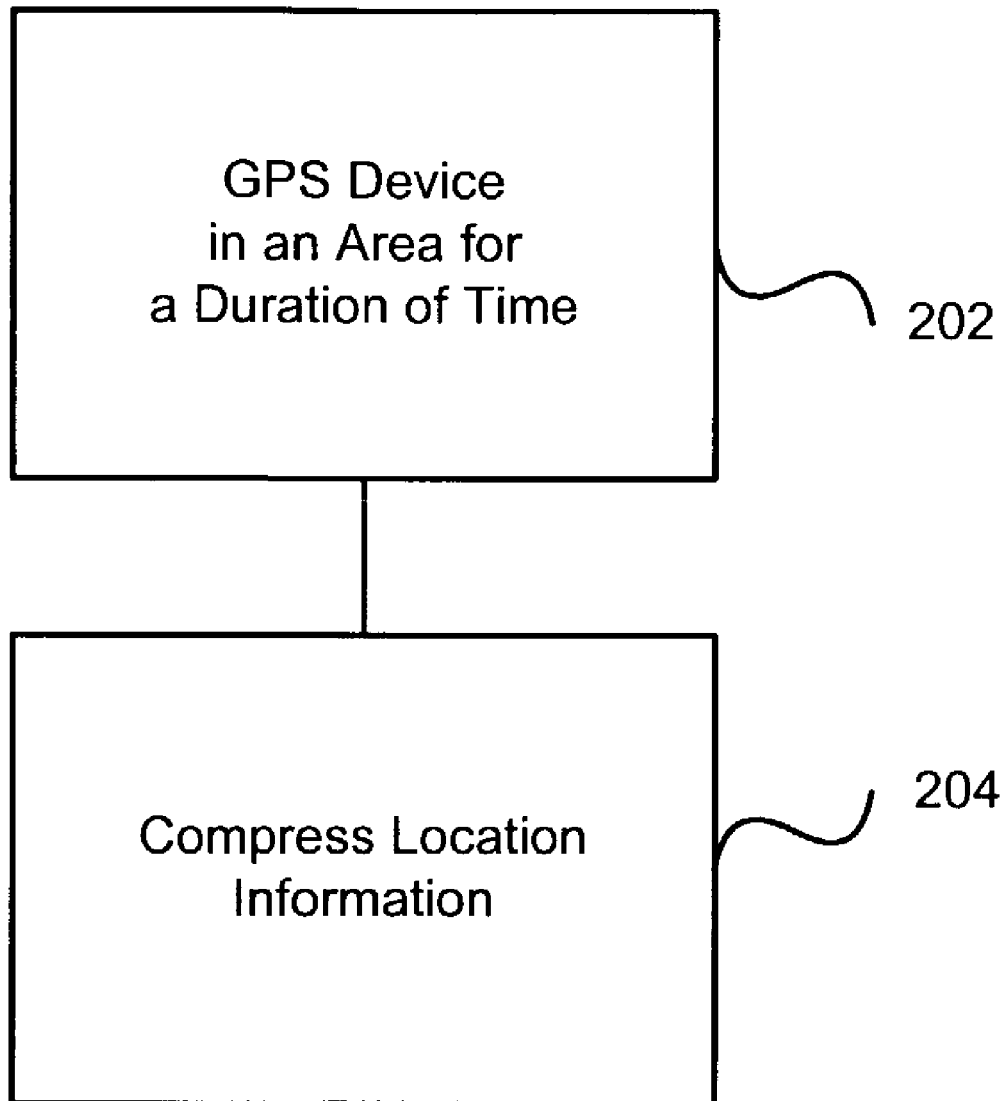


Figure 3(a)



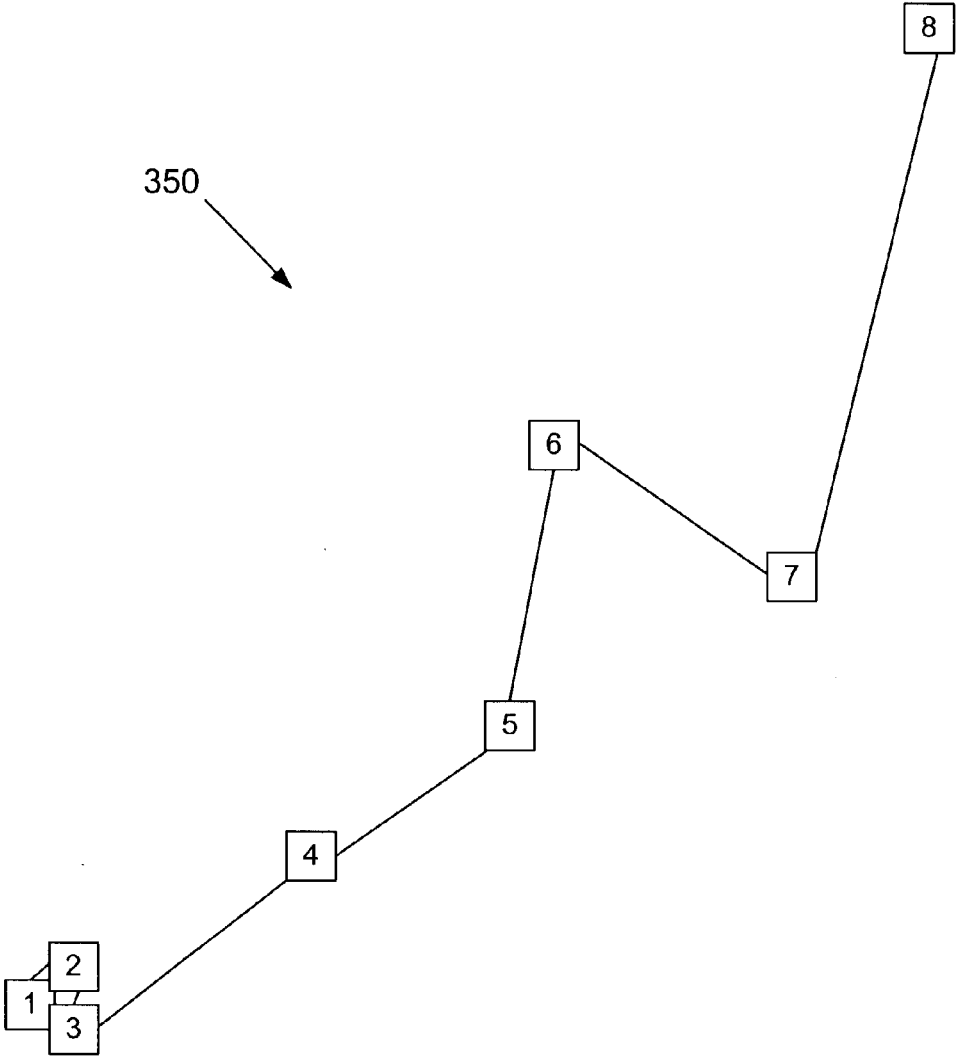


Figure 3(b)

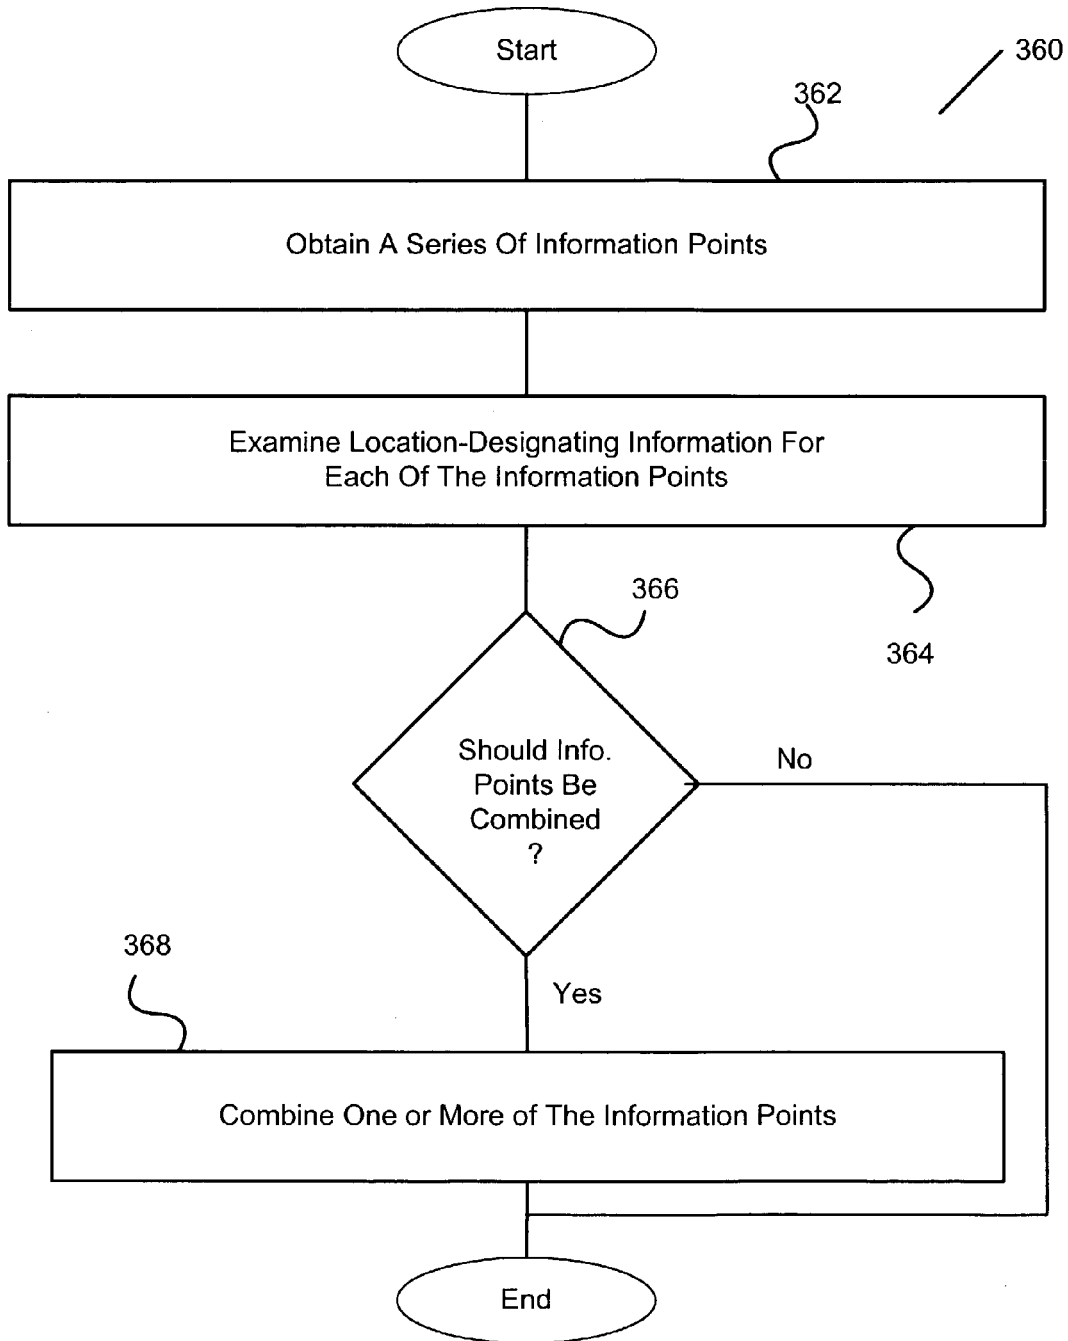


Figure 3(c)

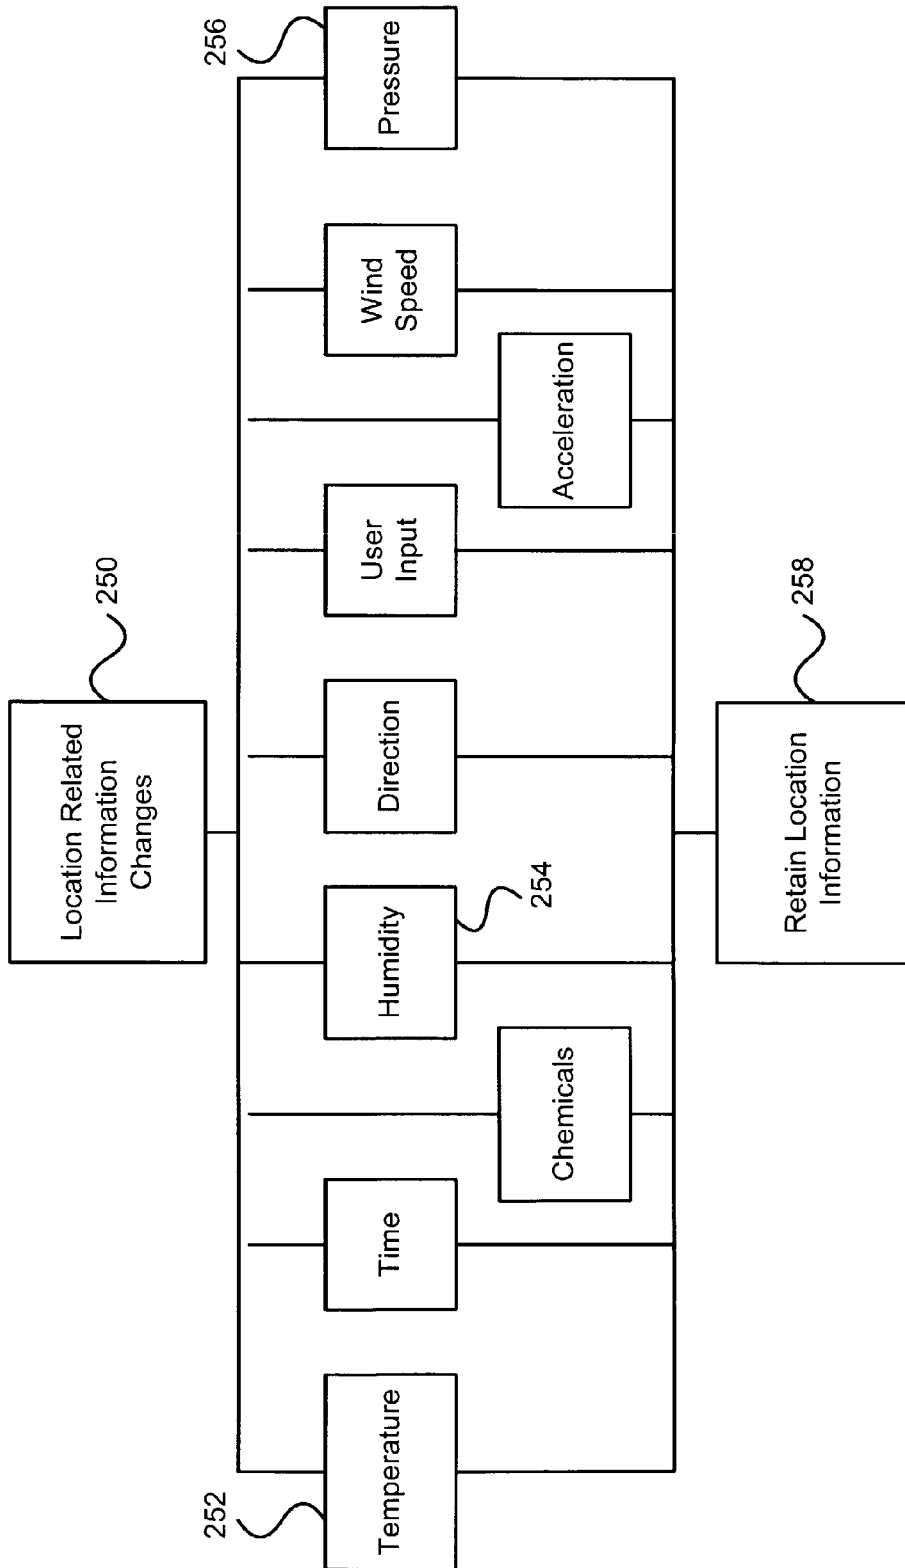


Figure 4

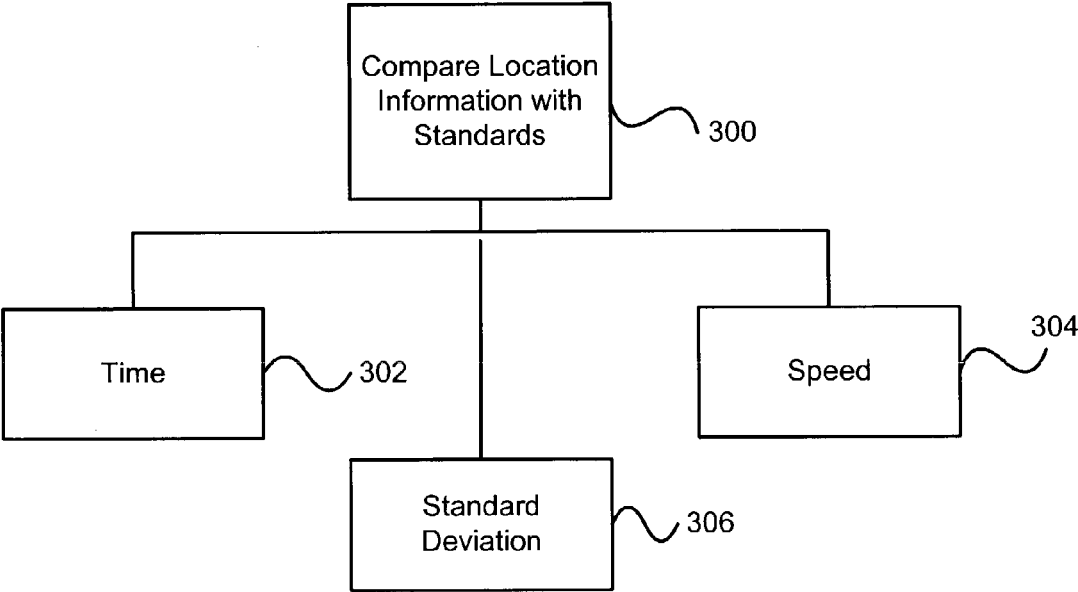


Figure 5

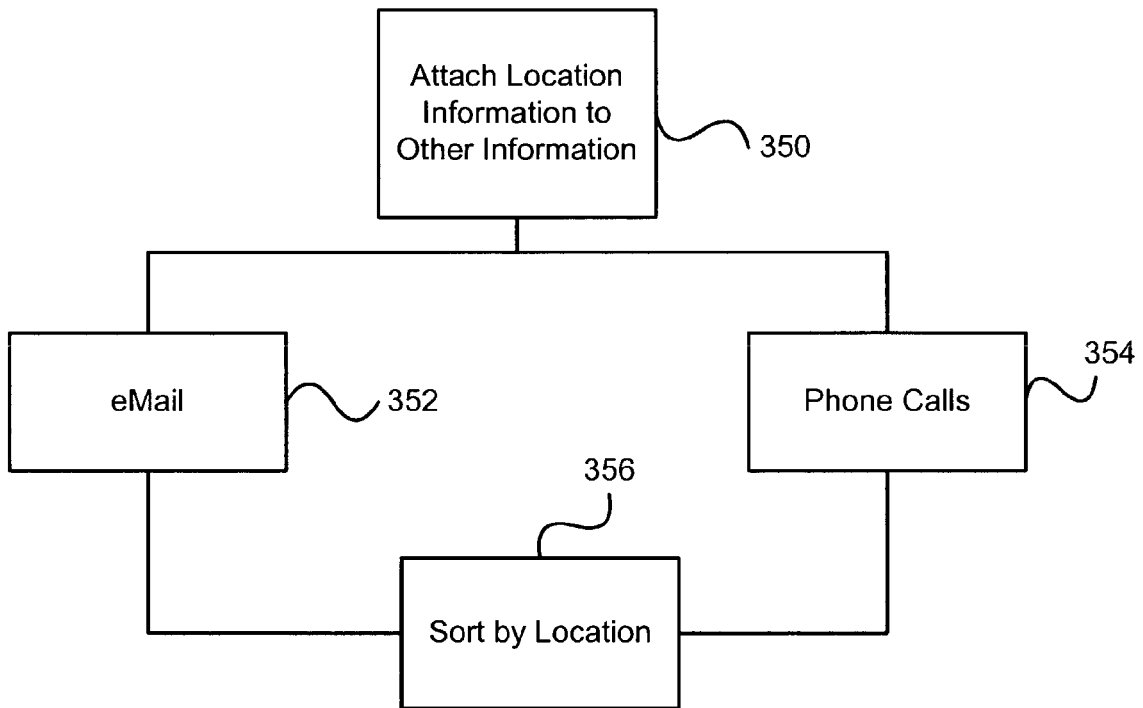


Figure 6

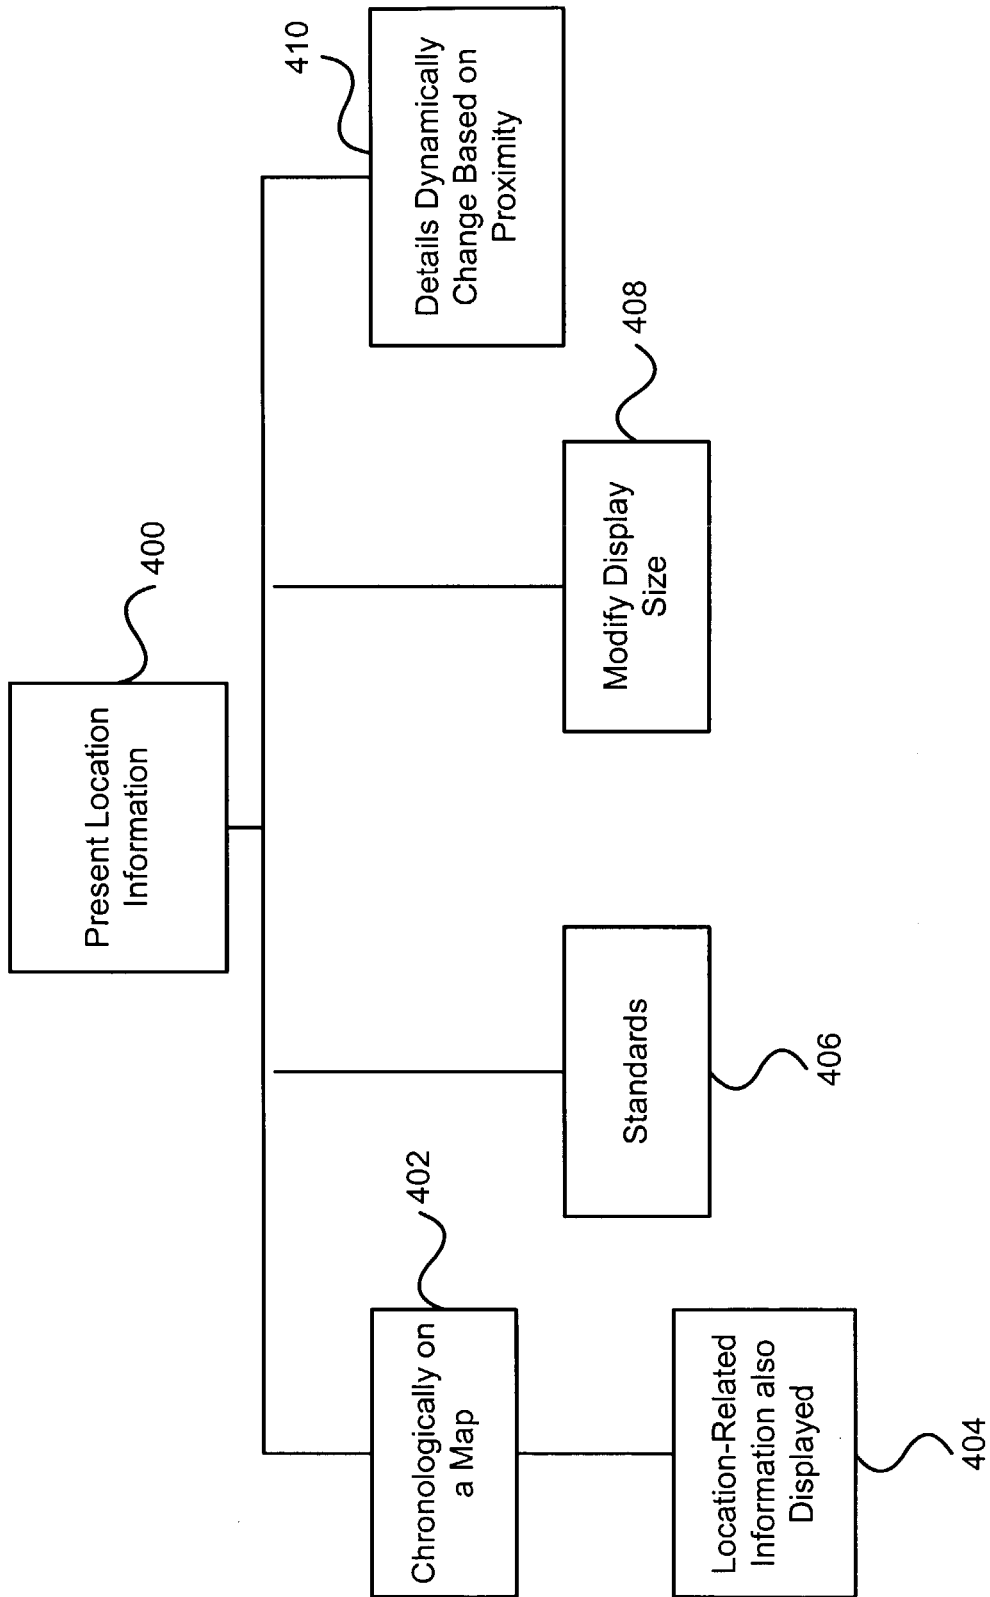


Figure 7

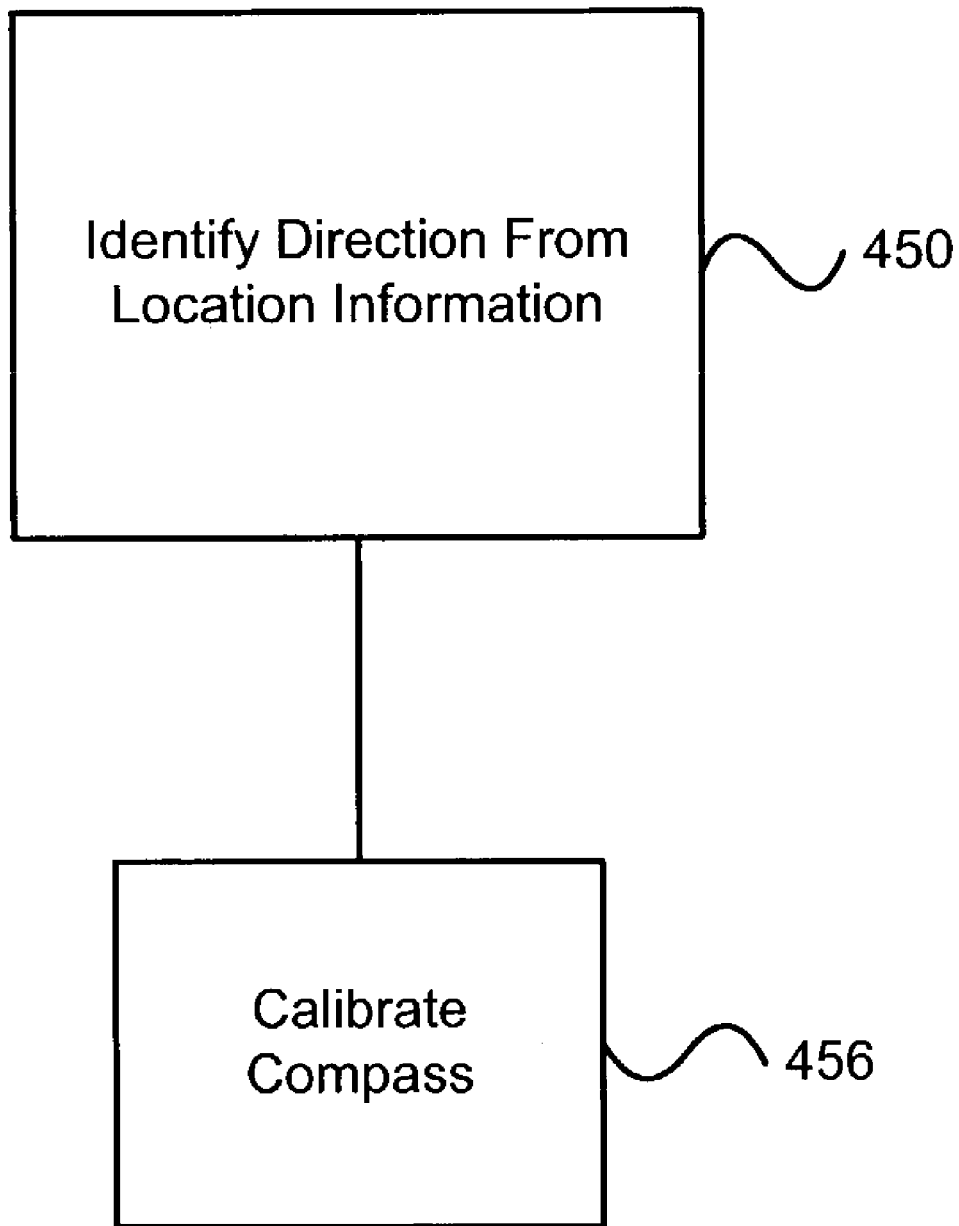


Figure 8

## METHODS AND APPARATUS TO ANALYZE AND PRESENT LOCATION INFORMATION

### CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Continuation-In-Part of U.S. Patent Application No. 09/797,517, filed Feb. 28, 2001, and entitled "METHOD AND SYSTEM FOR LOCATION TRACKING," which is hereby incorporated herein by reference, and which claims the benefit of U.S. Provisional Patent Application No. 60/185,480, filed Feb. 28, 2000, and entitled "METHOD AND SYSTEM FOR LOCATION TRACKING" which is hereby incorporated herein by reference.

This application claims benefit of: (i) U.S. Provisional Patent Application No. 60/444,198, filed Jan. 30, 2003, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING STATUS INFORMATION," which is hereby incorporated herein by reference; (ii) U.S. Provisional Patent Application No. 60/418,491, filed Oct. 15, 2002, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING STATUS INFORMATION," which is hereby incorporated herein by reference; (iii) U.S. Provisional Patent Application No. 60/404,645, filed Aug. 19, 2002, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING POSITION AND OTHER INFORMATION," which is hereby incorporated herein by reference.

This application is also related to: (i) U.S. patent application Ser. No. 10/397,473, filed Mar. 26, 2003, and entitled "METHOD AND APPARATUS FOR INTELLIGENT ACQUISITION OF POSITION INFORMATION;" (ii) U.S. patent application Ser. No. 10/397,641, filed Mar. 26, 2003, and entitled "METHOD AND SYSTEM FOR PERSONALIZED MEDICAL MONITORING AND NOTIFICATIONS THEREFOR;" (iii) U.S. patent application Ser. No. 10/397,637, filed Mar. 26, 2003, and entitled "METHOD AND SYSTEM FOR PROVIDING SHIPMENT TRACKING AND NOTIFICATIONS;" (iv) U.S. patent application Ser. No. 10/397,640, filed Mar. 26, 2003, and entitled "INEXPENSIVE POSITION SENSING DEVICE;" (v) U.S. patent application Ser. No. 10/397,474, filed Mar. 26, 2003, and entitled "METHOD AND SYSTEM FOR ENHANCED MESSAGING;" and (vi) U.S. patent application Ser. No. 10/397,512, filed Mar. 26, 2003, and entitled "Applications of STATUS Information for Inventory Management."

### BACKGROUND OF THE INVENTION

GPS (Global Positioning System) has been used extensively for navigation, positioning, and other research applications. It includes a group of satellites transmitting very precise signals. The nominal GPS Operational Constellation consists of 24 satellites that orbit the earth with 12-hour periods. These space vehicles (SV's) send radio signals that consist of time-tagged data bits marking the time of transmission, and information on the locations of the SV's, at the time they are transmitted. GPS receivers convert the received SV signals into the receivers' position. Four satellites are required to compute the four dimensions of X, Y, Z (position) and time. GPS receivers at precisely known

reference locations can provide corrections and relative positioning data for receivers at other locations. Another use of GPS is to provide precise time and frequency standards through the use of precise clocks on-board the SV's.

For about two decades, GPS receivers have been used primarily in the outdoor environment. It is more challenging to use them indoors. The signal strength from the SV's can be much reduced, such as by two orders of magnitude. A number of companies have been developing indoor GPS receivers. They are enticed by the US Federal Communications Commission's E911 telecommunication initiatives, which require wireless phone providers to locate any phone making a 911 emergency call.

The E911 initiative will greatly increase the proliferation of GPS devices. Telematics—the field of mobile services delivered wirelessly to in-vehicle devices—will further help GPS penetrate into different sectors of the society. One of the most visible manifestations of telematics is GPS-based navigation systems. They provide turn-by-turn directions and other information wirelessly to vehicle operators.

The amount and availability of GPS information will dramatically increase in the coming area. One challenge this will present is how to effectively use such information. There are needs for techniques to efficiently and intelligently analyze, process and present GPS information.

### SUMMARY OF THE INVENTION

In general terms, the present invention pertains to the analysis of location information and/or the presentation of such information in an easy-to-digest manner.

Each piece of location information can include a piece of location-designating information and a piece of location-related information. Location-designating information is primarily for identifying location. In one embodiment, the location-designating information is longitudinal and latitudinal coordinates. Location-related information is information related to location-designating information. The location-designating information and the location-related information can be supplied by a mobile device. Multiple pieces of location-designating information can be retrieved and processed.

In one embodiment, each piece of location-designating information can be transformed into a label to help identify a location. To better identify locations, the process of transforming location-designating information into labels can use location-related information. For example, the mobile device is very close to the boundary of a theatre and a bookstore, and is about 40 feet from the ground level. One piece of location-related information is information on the environment. It indicates that the theatre has only one floor, while the bookstore has three floors. Since only the bookstore has more than one level and the mobile device is about 40 feet from the ground level, the mobile device is in the bookstore, not the theatre.

In another embodiment, the amount of location information can be reduced. An entire area can, for example, be represented by a single label. For analysis, all of the location-designating information pertaining to a given area can be compressed (or consolidated) into one piece of location-designating information related to the label. This compression (or consolidation) process can be impacted or assisted by location-related information. For example, if a piece of location-related information changes by more than a pre-set



value, the corresponding piece of location information will be retained.

To better present location information in an easy-to-digest manner, location information can be compared to standards. The standards can be related to time.

Presentation can be visually on a display with respect to a reference location. For example, the amount of detail displayed between the location of the mobile device and the reference location can dynamically change. This change can depend on the distance between the location of the mobile device and the reference location. Such an implementation is helpful particularly in situations when the size of the display is fixed.

The invention can be implemented in numerous ways, including as a method, system, device, or computer readable medium. Different embodiments of the invention will be discussed in subsequent sections.

Other aspects and advantages of the present invention will become apparent from the following detailed description, which, when taken in conjunction with the accompanying drawings, illustrates by way of examples the principles of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1(a) shows one embodiment of the present invention.

FIG. 1(b) is a flow diagram of label processing according to one embodiment of the invention.

FIG. 2 shows examples of location-related information to help identify a location in the present invention.

FIG. 3(a) shows one embodiment of compressing location information in the present invention.

FIG. 3(b) illustrates an exemplary path of movement of a location-designating device over a period of time.

FIG. 3(c) is a flow diagram of consolidation processing according to one embodiment of the invention.

FIG. 4 shows embodiments regarding retaining location information in the present information.

FIG. 5 shows embodiments of attaching location information to other information in the present invention.

FIG. 6 shows examples of standards compared to location information in the present information.

FIG. 7 shows embodiments related to the presentation of location information in the present invention.

FIG. 8 shows one embodiment of using location information to calibrate a compass in the present invention.

Same numerals in FIGS. 1–8 are assigned to similar elements in all the figures. Embodiments of the invention are discussed below with reference to FIGS. 1–8. However, those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes as the invention extends beyond these limited embodiments.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention pertains to the analysis of location information and/or the presentation of such information in an easy-to-digest manner. In one embodiment, there are two types of location information. One type is location-designating information, and the other is location-related information. Location-designating information is primarily for identifying locations. The location-designating information can be longitudinal and latitudinal co-ordinates, or raw measurements (or pseudo-ranges) from GPS satellites.

Location-related information is additional information that is related to a location. As will be explained in detail below, the location-designating information and the location-related information can be used in analyzing and presenting location information.

There can be a number of ways to generate location-related information. Some of the information can be automatically captured by additional sensors. Other can be entered by a person. For example, a user with a mobile device is in a bookstore. The mobile device is location-aware (e.g., GPS enabled) and can capture location-designating information. One type of location-aware mobile device is a mobile device that includes a GPS device (or GPS receiver). The user can add comments about the bookstore, or enter personal information and digitized pictures into his mobile device. The URL of the bookstore can be included. The user can be next to a house with a Wi-Fi network that allows the mobile device to get online. These can all be information related to the location, and can be automatically provided, or entered by the user. Such location-related information can be coupled to location-designating information, such as for identifying the location of the bookstore.

The company or organization at the location can broadcast certain information for attachment. For example, the bookstore can broadcast the URL of its website, or of special offers using the Bluetooth standards. Assume that the mobile device has Bluetooth technologies, and is Bluetooth enabled. With authorized reception of data, the mobile device can capture the broadcast signal and attach the information as a piece of location-related information.

Other sensors can be coupled to the mobile device to capture location-related information. For example, there can be a temperature sensor, a digital compass, a humidity sensor, a pressure sensor, a wind-speed sensor, an acceleration sensor or an accelerometer, a chemical sensor detecting chemical substance, a mechanical stress sensor, and/or other sensors to provide location-related information. The sensor data can be electronically coupled to corresponding location-designating information as location-related information.

Some of these sensors can be micro-electro-mechanical systems or micromachines. These sensors can be integrated with driving, controlling and signal processing electronics, and the integration can be monolithic.

The present invention can be implemented in a computing system. The computing system can be a standalone computing apparatus, a server computer, a client computer, a server computer with one or more client computers, or a computer in a peer-to-peer network. A client computer can be a thin-client. A client computer communicates to the server computer through a communication link or computer network. In one embodiment, a server computer, which can be software and/or hardware, is capable of responding to a communication initiated by a client computer with respect to an application. Similarly, a client computer, which can be software and/or hardware, is capable of initiating communication with a server computer with respect to an application. The computing system can also be a handheld computer, a personal digital assistant or a cellular phone.

The computing system can include a bus connecting a number of components, such as a processing unit, a main memory, an I/O controller, a peripheral controller, a graphics adapter, a circuit board and a network interface adapter. The I/O controller can be connected to components, such as a hard disk drive or a floppy disk drive. The peripheral controller can be connected to one or more peripheral

5

components, such as a keyboard or a pointing device. The graphics adapter can be connected to a monitor. The circuit board can be coupled to audio signals; and the network interface adapter can be connected to the network, which can be the Internet, an intranet, or other forms of networks. The processing unit can be an application specific chip. The computing system can include more than one processor, and can process information through parallel processing.

The present invention can also be implemented as a computer readable medium including at least computer program code for analyzing and/or presenting location information according to different embodiments described.

FIG. 1(a) shows a location resolution system 100 according to one embodiment of the present invention. The location resolution system 100 includes a retriever 102 to retrieve location information, and a transformer 104 to transform location-designating information into labels. Typically, location-designating information includes a set of numerical values. They can be raw measurements from GPS devices, or longitudinal and latitudinal coordinates, or other

6

In one embodiment, the location information can then be queried by a query processor. The query processor can be used by a person to query the information. As an example, one can search for the label, "Exploratorium". The following information can be retrieved in a table format:

Location	Exploratorium
Address	3601 Lyon Street, San Francisco, CA 94123
GPS co-ordinates	W 122° 26' 52.9" N 37° 48' 11.2"
Web site	www.exploratorium.edu
Miscellaneous information	...

A history of when the user was at the location can also be retrieved, as exemplified by the following table:

From	To	Date	On	Comments	Other Information
1:05 pm	3:02 pm	Feb. 2, 2002	Saturday	Lucas likes the place. Should visit more often.	A picture of Lucas we took outside: Lucas.tif
2:00 pm	3:10 pm	Mar. 2, 2002	Monday	Andy was fascinated by the anatomy of a human body.	A web site on human anatomy: <a href="http://www.bartleby.com/107/">http://www.bartleby.com/107/</a>

numerical representation of locations. It is not easy for a person to know where a location is just by looking at these numerical values.

In one embodiment of the present invention, labels are representations of locations that are easier to understand than the numerical representations. For example, instead of the set of longitudinal and latitudinal coordinates—W 122° 26' 52.9° and N 37° 48' 11.2"—its corresponding label can be the Exploratorium, the name of the place (e.g., business, home or other point of interest) with that set of coordinates. A label can be the physical address of the place. In the case of the Exploratorium, it is 3601 Lyon Street, San Francisco, Calif. 94123. Labels can help people better identify a place than a set of numbers.

In transforming location-designating information into labels, the transformer can access a location database. In one embodiment, a previously-created database maps location-designating information, such as longitudinal and latitudinal co-ordinates, to their corresponding labels. The location database can be in the mobile device or in a remote server wirelessly coupled to the mobile device. Access to the location database can be restricted through password protection or other techniques.

The system identifies the labels corresponding to location-designating information, and retrieves such information from the database. The system can be in the mobile device or it can be in a remote server. Labels can then replace the location-designating information, and can couple to the corresponding location-related information. For example, the location-related information can be stored along with the labels in the mobile device, such as a personal-digital assistant. In another example, the location-related information is stored along with the labels in a remote computer.

The information can be queried in different ways. For example, one can find out where the user was on Mar. 2, 2002 at 3 pm through standard searching algorithms.

FIG. 1(b) is a flow diagram of label processing 120 according to one embodiment of the present invention. The process 120 can be performed on a server or a client.

The label processing 120 initially obtains 122 location coordinates provided by the mobile device. The mobile device is location aware and thus typically captures location coordinates. Additionally, location-related information is obtained 124. The location-related information is associated with the location coordinates. The location-related information can also be provided by the mobile device. For example, the mobile device can include one or more sensors or input devices to acquire the location-related information. Then a location label can be acquired 126 for the location coordinates based on the location coordinates and the location related information.

Through use of both the location coordinates and the location-related information, more accurate location labels are able to be acquired. The location labels are more descriptive of actual location and are more user-friendly than the location coordinates. The acquisition of location labels can also be considered as a transformation of location coordinates into location labels.

In many situations, it may not be clear where a location corresponding to a piece of location-designating information really is. The resolution of GPS devices can have errors of 15 meters or more. Based on the location-designating information, the user may be at one or more locations. For example, a multi-story bookstore is directly adjacent to a single-story theatre. The user with a mobile device, such as a cell phone having a GPS device, might be standing at a window of the bookstore, with the window facing the

theatre. The cell phone can transmit the location-designating information or the corresponding labels to a remote system of the invention. Based on the accuracy of the GPS device, the system is aware that the user is in the vicinity of the bookstore and the theatre. But the system may not be able to pinpoint whether the user is in the bookstore or the theatre.

FIG. 2 shows examples of location-related information to help identify a location. One approach is to use a piece of information regarding the environment **154** where the person is located. Location-designating information from a GPS device can identify not only the longitudinal and latitudinal coordinates, but also the elevation. Assume the elevation coordinate indicates that the person is about 40 feet from the ground level. Based on information regarding the environment, only the bookstore has more than one level, the user is in the bookstore. Thus, depending on the location-related information of the bookstore having multi-story, the transformer identifies the bookstore as the correct location. In this example, the name of the bookstore can be the transformed label.

Another approach to better define a location is to use the time **152** information provided by GPS. For example, at time  $x$ , the user is close to the junction of the theatre and the bookstore. Assume at time  $(x+10$  seconds), the person has moved to the center of the bookstore. Based on this second piece of information, the system infers that at time  $x$ , the user was in the bookstore, not the theatre. In this approach, location information at different time frames are evaluated or collected to better define a location.

Yet another approach to better define a location is to use direction **156** information. Again, assume that the user at the junction of the theatre and the bookstore. One rule can be that while the user is at the junction, the user is in the bookstore if he is moving in the direction of the bookstore. One approach to measure direction depends on taking two pieces of location information at two different time frames, such as 5 seconds apart. Based on the second location, the direction of travel at the first location can be identified.

In stead of using location information at different time frames, direction **156** can be provided by a direction sensor (e.g., digital compass) in the mobile device (e.g., cell phone). Such direction information can be coupled to the location-designating information, and transmitted to another computing apparatus to have the location information analyzed. In another embodiment, the information is not transmitted, but is analyzed in the mobile device. Based on the analysis, the mobile device can display the label on its screen.

It could also be up to the user **158** to better define the location. The mobile device can identify a few choices for the user to select. For example, a display on the mobile device can show the options of both the bookstore and the theatre. The user can select one of them by using a pointing device on a digitizer, a scrolling function to allow selection, or a voice recognition system, where the user can verbally make the selection.

Also, a history **160** of prior locations or frequently visited locations could be used to better define the location. For example, based on the history, the user visits a bookstore at least ten times more than its adjacent theatre. Then, if the location-designating information indicates that the user can be in the bookstore or in its adjacent theatre, one rule will assume the user to be in the bookstore. The history **160** can also be used to make processing more efficient proximate to a prior location, the current location can be deemed to be the same as the prior location, typically with minimal processing.

The amount of location information can be quite large. In one embodiment, a system of the invention also includes a compressor to compress the amount of location information.

FIG. 3(a) shows one embodiment of compressing location information according to one embodiment of the present invention. In this approach, the user with a mobile device coupled to a GPS device is in an area for a duration of time **202**. During this time period, the device collects sets of location information, each at a specific time. Through analysis, it has been determined that the device is in the same area during this time period. For example, every set of longitudinal and latitudinal coordinates is mapped to the same label. The compressor will compress all of the location-designating information **204** to one set, indicating the device being in the area during that time period.

In one approach, the compressor retrieves sets of longitudinal and latitudinal co-ordinates of the GPS device, and transforms them to labels. As the compressor transforms a set of longitudinal and latitudinal coordinates of a piece of location information into a label, it also compares that label with the label from the immediately prior time. If the two labels are the same, the compressor will not store the location information of that label for additional analysis. In one embodiment, additional pieces of location-designating information in the same zone as the immediately earlier piece will not be further analyzed. If two labels are the same, they can be considered to be in the same zone; if two labels are within a certain pre-determined distance from one another, they can be considered as to be in the same zone; or if the distance between the two sets is less than a pre-set value, again, they can be considered as to be in the same zone.

In another approach, if the distance between two sets of location-designating information is less than a pre-set value (e.g., predetermined value, tolerance, range or offset), the compressor will not store the second piece of location information, which is the location information at a later time. This process can continue. For example, the compressor can determine the distance between a third set and the first set to be still less than the pre-set value. Again, the third set of location information need not be stored.

Under certain conditions, even if the device has not moved out of an area designated by a label, there might still be changes in certain information, warranting the keeping of location information, or at least some portion of it. For example, the user is transporting humidity-sensitive chemicals within a certain area of the city, and suddenly it rains heavily, significantly changing the humidity. It might be desirable to be aware of the location and time when such changes occurred.

FIG. 3(b) illustrates an exemplary path **350** of movement of a location-designating device over a period of time. Namely, the exemplary path **350** is composed of a sequence of eight (8) locations where location-designating information and location-related information were captured. A sequence of locations of a path can be processed to compress what would otherwise be large and unmanageable amounts of information. Once compressed, the quantity of data is reduced and the information is more user-friendly. Table 1 provided below illustrates exemplary location-designating information and location-related information that have been captured for the eight (8) locations shown in FIG. 3(b).

TABLE 1

	1	2	3	4	5	6	7	8
Label	—	—	—	—	—	—	—	—
Long.	X1	X2	X3	X4	X5	X6	X7	X8
Lat.	Y1	Y2	Y2	Y4	Y5	Y6	Y7	Y8
Time	1:00 pm	1:15 pm	1:30 pm	1:45 pm	2:00 pm	2:15 pm	2:30 pm	2:45 pm
Date	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002
Temp.	90	90	90	89	89	88	88	87
Other	—	—	—	—	—	—	—	—

The data stored in the Table 1 can represent the raw data provided by the location-designating device. At this point, in this embodiment, the descriptive labels are not known, but the longitude and latitude coordinates are known (e.g., provided by GPS device). The date and time can be provided by a GPS device or by a clock within the location-designating device. Further, other sensors can provide various other location-related information. In this example, the other location-related information includes at least temperature and an “other” category to represent one or more other pieces of information.

The data stored in Table 1 can then be compressed to a more compact and manageable form. Table 2 provided below illustrates exemplary compression processing on the data within Table 1.

TABLE 2

point	1	2	3	4	5	6
Label	Exploratorium, SF	Rt. 101, So. SF	Rt. 101, Menlo Park	Rt. 101, Mountain View, CA	7Eleven, Saratoga, CA	Home, Saratoga, CA
Long.	—	—	—	—	—	—
Lat.	—	—	—	—	—	—
Time	1:00–1:30 pm	1:45 pm	2:00 pm	2:15 pm	2:30 pm	2:45 pm
Date	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002	Jan. 1, 2002
Temp.	90	89	89	88	88	87
Other	—	—	—	—	—	—

As shown, the locations 1–3 in Table 1, along the path 350 as shown in FIG. 3(b), are very close to one another and such is reflected by the longitude and latitude coordinates for these locations. Hence, by examining the first 3 locations, the compressor determines that these location are to be treated as the same location. Here, based on information from a location database, assume that the location is the Exploratorium in San Francisco, Calif. In effect, these location points can collapse into a single location point. However, any difference between the individual location points (such as their location-related information) can be preserved if desired. The other locations 4–8 in Table 1 (now locations 2–6 in Table 2) are deemed to represent different locations and are individually processed for labels. Once a label is identified, the longitude and latitude coordinates can be eliminated if desired.

The exemplary compression processing shown with Table 2 is only one simplified example; hence, it should be understood that compression processing can be performed in a wide variety of different ways.

FIG. 3(c) is a flow diagram of consolidation processing 360 according to one embodiment of the invention. The consolidation processing 360 can be performed on a server or a client or a computing device in a peer-to-peer network.

The consolidation processing 360 initially obtains a series of information points 362. The series can be ordered based on the time each point is acquired. The series of information points are, for example, obtained from storage or directly from a mobile device. Each of the information points typically has location-designating information and location-related information. Next, the location-designating information for each of the information points is examined 364. A decision 366 then determines whether any of the information points should be combined. Here, in this embodiment, the decision 366 is based on the location-designation information for the information points. For example, if two consecutive location-designation information are substantially matched, the two information points should be combined.

One rule regarding matching can be that if two consecutive location-designation information are close to each other, such as within 5 meters apart, they are considered as substantially matched. Another rule can be that if two consecutive pieces of location-designation information are in the same area, point of interest or label, they are considered substantially matched.

In another embodiment, the decision 366 can be based on not only the location-designation information but also the location-related information. If two consecutive pieces of location-designation information and location-related information are substantially matched, the two information points should be combined. Different thresholds can be set to determine if location-related information from different points are substantially matched. For example, the location-related information is the temperature of the environment. One rule can be that if the temperature of two consecutive points are close to each other, such as setting the threshold to be 3 degrees, the location-related information from the two points are considered substantially matched. Another rule can be that if the difference between two consecutive pieces of location-related information is less than a certain percent, such as 3%, of the value of the first piece of location-related information, the two pieces of location-related information are considered substantially matched.

In any case, when the decision **366** determines that some of the information points should be combined, the two or more of the information points are combined **368**. On the other hand, the information points are not combined when the decision **366** determines that these information points should not be combined.

Once information points are combined, the resulting information point can be a normal information point (with perhaps additional data) or a compound information point (retaining some or all of the data of the information points being combined). For example, information under each of the locations in Table 1 can be considered information under an information point. Information points **1–3** under Table 1 are combined into information point **1** under Table 2. The new information **1** can be considered a compound information point because it retains some of the time information of points combined. In any case, the combining of information points operates to consolidate the series of information points such that the data is more compact and/or better organized.

FIG. **4** shows examples of location-related information **250** regarding consolidation. For example, the location-related information can include temperature **252**, humidity **254**, direction, wind speed, time, user-input, chemicals, acceleration and pressure **256**. Some of the location-related information is information regarding the environment where the location-designating device is located, such as temperature, humidity, wind speed, chemicals, and atmospheric pressure, tire pressure or other types of pressures. Other of the location-related information can pertain to the location-designating device itself, such as the acceleration of the device, or the pressure being asserted on the device. Examples of other sensors to provide related information include carbon monoxide detectors, liquid sensors, metal detectors, color sensors, scent sensors, light sensors, pattern sensors, tactile sensors, sound sensors, motion detectors, smoke sensors, particle sensors and radiation detectors, such as infrared detectors. Related information can be captured by the corresponding sensors, with the related-information coupled to location-designating information. The coupling can be achieved wirelessly. For example, a chemical sensor attached to a package can transmit the amount of certain gaseous chemicals through Bluetooth or WiFi technologies to the location-designating device, which is also coupled to the package.

The following provides additional examples of location-related information that impact consolidation or compression, and are used in determining to retain location information **256**. An administrator (e.g., user) can set a threshold for a location-related information. For example, a rule the administrator sets for the compressor can be: From position A to position B, if the temperature at any position changes by more than x degrees from that at point A, keep the location information at that position. Another rule can be: During any one-hour period, keep the location information where the humidity changes by, such as, more than 50% from that at the beginning of that hour. A third rule for a threshold can be that if time has elapsed by, such as, 1 hour, from the time when a piece of location information has been retained, keep the new location information. Another rule for a threshold can be that if a certain type of chemical exceeds a certain amount, keep the location information. Yet another rule can be that if a user has entered information at a specific location, keep the location information. In this case, the threshold can be set, for example, to zero or one character difference in user entry. If there is any changes in user entry,

such as from not entering anything to inputting something, or to inputting something different, the location information at that position can be kept.

Location information collected can be attached to other information. FIG. **6** shows a few embodiments of attaching certain location information **350** to other information. For example, labels can be attached to emails **352**, phone calls **354**, or other types of messages, when they are sent. Then, received emails not only indicate who sent them, they would also indicate the locations from where they were sent. Emails and phone calls can then be sorted **356** based on locations. In one embodiment, the sorting can be alphabetical, such as through the labels.

To help users digest location information, sometimes it is advantageous to compare them to standards. In one embodiment, a system of the invention includes a comparator for comparing location information with standards. FIG. **6** shows examples of standards for comparison. In one example, a label represents a five-mile strip (portion) of a specific highway. The average amount of time T **302** to travel through that five-mile strip is known. The user drives his car through the strip. The time he enters and exits that label is stored, and their difference is compared to T. If the difference is more than a pre-set threshold, a notification can be sent to the user. Similarly, the standard can be the speed **304** of a typical car traveling through that strip.

In another example, the amount of time can be that of an item on the shelf of a company, such as a supermarket. The location of that item is monitored.

Standard deviations, **306**, can also be tracked. This can be the standard deviation of the travel time of a specific car through the strip during the last two months. If the standard deviation is more than a pre-set threshold, the driver can be notified.

FIG. **7** shows embodiments related to the presentation **400** of location information. In one embodiment, location information can be presented chronologically on a map **402**. Location-related information can be coupled to the corresponding labels and displayed on the map **404**. For example, a piano is shipped from San Francisco to Toyko. The map can show chronologically where the piano is at different times. Next to the shipping path, there can be two other line graphs, one showing the humidity, and the other showing the temperature at the corresponding location and time. The location-related information can also be coupled to the corresponding labels and displayed as a link or visual indicator which is selectable to cause the location-related information to be displayed.

The presentation can be in a tabulated format, such as in a spreadsheet. Presentation can be in graphical formats, such as in bar charts or pie charts, in two or more dimensions.

Location information where a mobile device enters and exits a label can be presented. Location information where there are changes exceeding thresholds in location-related information can also be shown.

The display of location-related information can be through clickable icons **404** on a web site. For example, the user was in the Exploratorium at 4 pm. A small icon representing the Exploratorium can be displayed next to the location of the chart indicating where the user was at 4 pm. Clicking the icon would lead one to the web site of the Exploratorium.

Location information can be displayed with their standards **406**. For example, a display can show the speed of a car as a function of location. Next to that, there can be

another line showing standard speeds at the different locations.

In one embodiment, the display size can be modified **408**. For example, the screen on a handheld device can be small. When the user is in a car, the user can dock the device, which can electronically couple the device to a larger screen in the car for viewing.

In another embodiment, the locations of a GPS device are displayed with respect to a specific location. The amount of details displayed between the locations of the GPS device and the specific location can dynamically change **410**. This change can depend on the distances between the locations of the GPS device and the specific location. The amount of details can be defined as the density of the points of interest shown in an area. Points of interest can include the name of a street, the name of a park or other designations.

As an example, the number of labels shown between the locations of the GPS device and the specific location depends on the distances between the locations and the specific location. If the GPS device is very far away from the specific location, there will be many labels in between. With display size being fixed, if all of the labels are shown, the display can be cluttered. So, very few labels should be shown. However, as the GPS device approaches the specific location, the ratio of labels being shown and the total number of labels between the locations increases. This can be done dynamically, depending on the separation distance. One way is to fix the number of labels to be shown on the display to be fewer than a predetermined number (e.g., 10). If there are more than the predetermined number of labels to be shown, certain labels can be skipped, such as every other one. If there are 100 labels, and only 10 can be shown, then every 10<sup>th</sup> label can be selected to be shown. In this example, even a label is in between the GPS device and the specific location, the label may not be displayed. In other words, whether a label between the location of the GPS device and the specific location is displayed or not depends on the distance between the location of the GPS device and the specific location. Note that whether a label is displayed or not can also depend on user preferences. The user can require a label to be shown if the label is between the location of the GPS device and the specific location.

In another example, the specific location is the location of another GPS device. That specific location can change as the other GPS device is moved.

Location information can be dynamically generated. As the GPS device moves, location information can be generated. So the presentation of location information can change as a function of time.

In a number of embodiments, a label identifies locations that are two-dimensional. However, a label can identify a three-dimensional volume. In other words, elevation coordinates can be included.

The present invention has described one or more GPS devices as location-designating devices to identify a location. However, the present invention is not limited to using one or more GPS devices to identify a location. In certain situations, other wireless or mobile devices can also serve as location-designating devices, such as devices based on GSM technologies or Wi-Fi technologies. Through the techniques of triangulation, these devices can also designate a location. Such triangulation techniques should be known to those skilled in the art.

Note that the process of transforming location coordinates into labels and the process of using additional information to help identify a location can be performed by two separate entities. In other words, a corporation can be responsible to

transform location coordinates into labels. Then another corporation is responsible to clarify the location corresponding to a piece of location-designating information, using, for example, location-related information.

A number of embodiments have been described where the process of transforming location coordinates into labels or the process of compressing depends on a piece of location-related information. Note that such processes can depend on more than one piece of location-related information. Also, the multiple pieces of location-related information can be of different types. For example, the process of transforming can depend on time and a piece of information regarding the environment.

As described above, since multiple pieces of location information from a GPS device can identify direction **450**, the GPS device can be used to calibrate a digital compass, **452**, as illustrated in FIG. 8. A GPS device can provide multiple location information as a function of time. If the person carrying the device is traveling along a certain constant direction, the multiple location information will be able to identify that direction. The direction information can then be used to calibrate a digital compass, as long as the compass is attached to, or traveling in the same direction as, the GPS device.

The above-described systems, devices, methods and processes can be used together with other aspects of a monitoring system, including the various aspects described in: (i) U.S. Provisional Patent Application No. 60/444,198, filed Jan. 30, 2003, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING STATUS INFORMATION," which is hereby incorporated herein by reference; (ii) U.S. Provisional Patent Application No. 60/418,491, filed Oct. 15, 2002, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING STATUS INFORMATION," which is hereby incorporated herein by reference; (iii) U.S. Provisional Patent Application No. 60/404,645, filed Aug. 19, 2002, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MONITORING, DELIVERING, MANAGING AND USING POSITION AND OTHER INFORMATION," which is hereby incorporated herein by reference; and (iv) U.S. Provisional Patent Application No. 60/375,998, filed Apr. 24, 2002, and entitled "SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MANAGING AND USING POSITION INFORMATION," which is hereby incorporated herein by reference.

The various embodiments, implementations, features and aspects of the invention noted above (including those incorporated by reference) can be combined in various ways or used separately. Those skilled in the art will understand from the description that the invention can be equally applied to or used in other various different settings with respect to various combinations, embodiments, implementations or features provided in the description herein.

The invention can be implemented in software, hardware or a combination of hardware and software. The invention, or at least certain software portions of the invention, can also be embodied as computer readable code on a computer readable medium. The computer readable medium is any data storage device that can store data which can thereafter be read by a computer system. Examples of the computer readable medium include read-only memory, random-access memory, CD-ROMs, magnetic tape, optical data storage devices, and carrier waves. The computer readable medium

15

can also be distributed over network-coupled computer systems so that the computer readable code is stored and executed in a distributed fashion.

Other embodiments of the invention will be apparent to those skilled in the art from a consideration of this specification or practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with the true scope and spirit of the invention being indicated by the following claims.

The invention claimed is:

1. A computer-implemented method comprising:  
retrieving at least a first piece of location-designating information from a location-designating device, the location-designating information identifying the location of the location-designating device, and being associated with a time;

transforming the first piece of location-designating information into a first label for identifying the location; and  
retrieving a first piece of location-related information related to the first piece of location-designating information;

wherein the label is typically a name of the location, and the label is stored in a memory device to allow the process of transforming to access it, and

wherein the method further comprises:

retrieving a second and a third piece of location-designating information from the location-designating device, which identify the locations of the location-designating device at later times than the time associated with the first piece of location-designating information, all three pieces of location-designating information being different from each other, and the second and the third piece of location-designating information being coupled to a corresponding second and third piece of location-related information respectively,

transforming the second and the third pieces of location-designating information into a second and a third label, the second label being the same as the first label and the third label being different from the first label, and

presenting the first and the third label chronologically to show the change in location of the location-designating device as a function of time, and

presenting the first piece of location-related information and the third piece of location-related information, but not presenting at least a portion of the second piece of location-related information.

2. A computer-implemented method as recited in claim 1 wherein the first piece of location-related information is related to a piece of information regarding the environment where the location-designating device is located.

3. A computer-implemented method as recited in claim 1 wherein the first piece of location-related information is related to time.

4. A computer-implemented method as recited in claim 1 wherein the first piece of location-related information is related to direction.

5. A computer-implemented method as recited in claim 4 wherein

the first piece of location-related information related to direction is from a digital compass; and

the method further comprises increasing the accuracy of the digital compass in identifying direction.

6. A computer-implemented method as recited in claim 1 wherein the first piece of location-related information is related to a history of locations visited by a user.

16

7. A computer-implemented method as recited in claim 1 wherein the second piece of location-related information is not stored for additional analysis.

8. A computer-implemented method as recited in claim 7 wherein the second piece of location-related information is still stored for additional analysis if the second piece of location-related information differs from the first piece of location-related information by more than a pre-set value.

9. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to temperature.

10. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to humidity.

11. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to pressure.

12. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to direction.

13. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to wind speed.

14. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to time.

15. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to an input from a user.

16. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to a chemical compound.

17. A computer-implemented method as recited in claim 8 wherein the first piece of location-related information is related to acceleration.

18. A computer-implemented method as recited in claim 1 further comprising analyzing two pieces of location-designating information to compare with a standard.

19. A computer-implemented method as recited in claim 18 wherein the standard is related to the amount of time an object travels between the locations corresponding to the two pieces of location-designating information.

20. A computer-implemented method as recited in claim 1 further comprising allowing a person to edit so as to change the first label.

21. A computer-implemented method as recited in claim 1 wherein at least one label is attached to an electronic mail.

22. A computer-implemented method as recited in claim 21 wherein

another label is attached to another electronic mail; and the electronic mails can be sorted based on location information from the attached labels.

23. A computer-implemented method as recited in claim 1 wherein at least one label is attached to a telephone call.

24. A computer-implemented method as recited in claim 23,

wherein at least another label is attached to another telephone call, and

wherein the two telephone calls can be sorted based on location information from the attached labels.

25. A computer-implemented method as recited in claim 1 wherein the labels are presented chronologically on a map.

26. A computer-implemented method as recited in claim 1 wherein at least one label is presented on a map, and at least one piece of location-related information is represented via a clickable icon on the map.

17

27. A computer-implemented method as recited in claim 1 wherein the labels are presented on a display of a handheld device; and the handheld device can be coupled to a screen larger than the display to present the labels. 5

28. A computer-implemented method comprising: retrieving at least a first piece of location-designating information from a location-designating device, which identifies the location of the location-designating device; 10

transforming the first piece of location-designating information into a first label for identifying the location; wherein the process of transforming depends on at least a piece of location-related information related to the first piece of location-designating information to better identify the location of the location-designating device, wherein the label is typically a name of the location, wherein the method further comprises: 15

- retrieving a plurality of pieces of location-designating information of the location-designating device at a plurality of locations;
- transforming the plurality of pieces of location-designating information into a plurality of labels; and 25
- presenting the locations of the location-designating device in terms of at least two labels,

wherein the locations of the location-designating device are presented on a display relative to a specific location, 30

wherein there are a plurality of labels between each of the locations of the location-designating device and the specific location, and

wherein at a specific time, whether a label between the location of the location-designating device and the specific location is displayed or not depends on the distance between the location of the location-designating device and the specific location. 35

29. A computer-implemented method comprising: retrieving at least a first piece of location-designating information from a location-designating device, which identifies the location of the location-designating device; 40

transforming the first piece of location-designating information into a first label for identifying the location; wherein the process of transforming depends on at least a piece of location-related information related to the first piece of location-designating information to better identify the location of the location-designating device, wherein the label is typically a name of the location, wherein the method further comprises: 45

- retrieving a plurality of pieces of location-designating information of the location-designating device at a plurality of locations;
- transforming the plurality of pieces of location-designating information into a plurality of labels; and 50

18

presenting the locations of the location-designating device in terms of at least two labels,

wherein the locations of the location-designating device are presented on a display relative to a specific location, wherein there are a plurality of labels between each of the locations of the location-designating device and the specific location, and

wherein at a specific time, the ratio of labels being presented on the display and the total number of labels between the location of the location-designating device and the specific location depends on the distance between the location of the location-designating device and the specific location.

30. A computer-implemented method as recited in claim 29 wherein the specific location is the location of another location-designating device.

31. A computer-implemented method as recited in claim 29 wherein a label is displayed due to the preference of a user.

32. A computer-implemented method comprising: retrieving a first piece of location-designating information from a location-designating device, the location-designating information identifying the location of the location-designating device, and being associated with a time; and

retrieving a second piece of location-designating information from the location-designating device, which identifies the location of the location-designating device at a later time than the time associated with the first piece of location-designating information; 5

wherein the method further comprises:

- transforming the first and the second piece of location-designating information into a first and a second label respectively for identifying the corresponding locations, with the labels typically being the names of the corresponding locations, and with the labels being stored in a memory device to allow the process of transforming to access them; and
- presenting the two labels chronologically to show the change in location of the location-designating device as a function of time;

wherein the locations of the location-designating device are presented on a display relative to a specific location, wherein there are a plurality of points of interest between each of the locations of the location-designating device and the specific location, and

wherein whether at least one point of interest between at least one location of the location-designating device and the specific location is displayed or not depends on the distance between that location of the location-designating device and the specific location. 10

\* \* \* \* \*



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,218,938 B1  
APPLICATION NO. : 10/397472  
DATED : May 15, 2007  
INVENTOR(S) : Lau et al.

Page 1 of 2

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page, Item (56) References Cited:

On page 3, Foreign Patent Documents:

“WO 98/017969 A1 1/1998” should be --WO 98/01769 A1 1/1998--.

On page 3, Other Publications:

“K. Miyake, “Sharpe to unveil 3G PDA-type cell phone,” ITworld.com, Inc., Jan. 11, 2002.”  
should be --K. Miyake, “Sharp to unveil 3G PDA-type cell phone,” ITworld.com, Inc., Jan. 11,  
2002--.


““Start-up crams single chip with phone, GPS and Bluetooth,” CNET Network, Inc. (ZDNET), March  
22, 2002 (downloaded: <http://news.zdnet.co.uk/story/0.t284-x2107163.00.html>).”  
should be --Start-up crams single chip with phone, GPS and Bluetooth,” CNET Network, Inc.  
(ZDNET UK), March 22, 2002 (downloaded:  
<http://news.zdnet.co.uk/story/0.t284-s2107163.00.html>).”--.

““Fleet Management Systems-Asset Tracking Devices,” Axiom Navigation Inc., 2000-2001  
(downloaded Oct. 19, 2002: [www.axiomnav.com/Prod\\_Systems/prod\\_systems.asp](http://www.axiomnav.com/Prod_Systems/prod_systems.asp)).”  
should be --“Fleet Management Systems-Asset Tracking Devices,” Axiom Navigation Inc.,  
2000-2001 (downloaded Oct. 19, 2002: [www.axiomnav.com/Prod\\_Systems/prod\\_system.asp](http://www.axiomnav.com/Prod_Systems/prod_system.asp)).--.

““Global Cell Phone Location,” Axiom Navigation Inc., 2000-2001 (downloaded Oct. 19, 2002:  
[www.axiomnav.com/Prod\\_Global/prod\\_global.asp](http://www.axiomnav.com/Prod_Global/prod_global.asp)).”  
should be --“Global Cell Phone Location,” Axiom Navigation Inc., 2000-2001 (downloaded Oct. 19,  
2002: [www.axiomnav.com/Prod\\_Global/prod\\_global.asp](http://www.axiomnav.com/Prod_Global/prod_global.asp)).--.

““Wherify Wireless Breakthrough in Location-Based Services,” Mobilemag.com, Feb. 28, 2001, pp.  
1.” should be --“Wherify Wireless Breakthrough in Location-Based Services,” Mobilemag.com, Feb.  
28, 2001, p. 1.--.

Signed and Sealed this  
Twenty-sixth Day of May, 2015



Michelle K. Lee  
*Director of the United States Patent and Trademark Office*

**U.S. Pat. No. 7,218,938 B1**

““Theme Park Visitors & Cashless Purchasing,” Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded March 16, 2002: [www.rji.cc/casestudies.themepark.html](http://www.rji.cc/casestudies.themepark.html)).”

should be --“Theme Park Visitors & Cashless Purchasing,” Theme Park Visitors Case Study, RJI Incorporated, webpages, pp. 1-2 (downloaded March 16, 2002: [www.rji.cc/casestudies/themepark.html](http://www.rji.cc/casestudies/themepark.html)).--.

““Welcome to Tracker Systems,” Tracker Systems, webpages, pp. 1-2 (downloaded Jun. 9, 2002: [www.trackersystems.com](http://www.trackersystems.com)).”

should be --“Welcome to Traker Systems,” Traker Systems, webpages, pp. 1-2 (downloaded Jun. 9, 2002: [www.trakersystems.com](http://www.trakersystems.com)).--.

““MY UPS.COM Benefits,” United Parcel Service of America, Inc. (UPS), webpages, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/benefits?pnav=stdsservice](http://www.ups.com/myupsinfo/info/benefits?pnav=stdsservice)).”

should be --“MY UPS.COM Benefits,” United Parcel Service of America, Inc. (UPS), webpage, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/benefits?pnav=stdservice](http://www.ups.com/myupsinfo/info/benefits?pnav=stdservice)).--.

““UPS Wirleless Solutions,” United Parcel Service of America, Inc. (UPS), webpage, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/wireless?pnav=stdsservice](http://www.ups.com/myupsinfo/info/wireless?pnav=stdsservice)).”

should be --“UPS Wireless Solutions,” United Parcel Service of America, Inc. (UPS), webpage, p. 1 (downloaded Apr. 13, 2002: [www.ups.com/myupsinfo/info/wireless?pnav=stdservice](http://www.ups.com/myupsinfo/info/wireless?pnav=stdservice)).--.

In the Specification:

In column 1, line 33, “herein by reference.”

should be --herein by reference; and (iv) U.S. Provisional Patent Application No. 60/375,998, filed April 24, 2002, and entitled “SYSTEM, METHOD AND APPARATUS FOR ACQUIRING, PRESENTING, MANAGING AND USING POSITION INFORMATION,” which is hereby incorporated herein by reference.--.

In column 2, line 7, “The signal strength from” should be --The signal strengths from--.

In column 2, line 24, “in the coming area.” should be --in the coming years.--.

In column 5, line 41, “26' 52.9° and N 37°” should be --26' 52.9" and N 37°--.

In column 7, line 39, “In stead of using” should be --Instead of using--.

In column 7, line 64, “more efficient proximate to” should be --more efficient. For example, if the history 160 indicates that the current location is same or proximate to--.

In column 10, line 59, “if the temperature of two” should be --if the temperatures of two--.

In column 12, line 26, “Similarity, the standard” should be --Similarly, the standard--.

In column 13, lines 21-22, “With display size being” should be --With the display size being--.